


24 Modulator


Contents

1 Product introduction	3
2 Operating Instructions	5
2.1 The front panel	5
2.2 Rear Panel	6
Attachment Cannel List	错误！未定义书签。

1 Product introduction

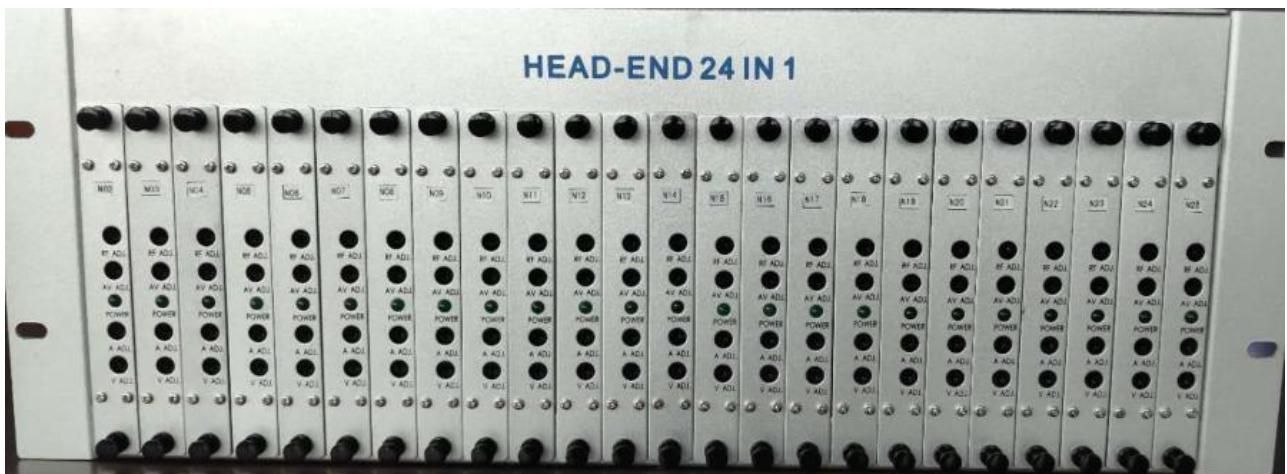

M24 is a 24 modular frequency agile modulator. It will be up to 24 audio and video signals into a road with 24 TV channels RF signals. The product is widely used in hotels, hospitals, schools, electronic teaching, factories, security monitoring, VOD video on demand and other places of entertainment, especially for digital TV analog conversion, and centralized monitoring system.

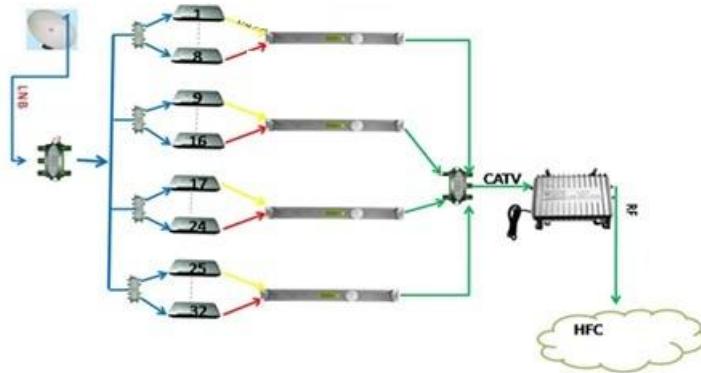

Product Features

- Stable and reliable
- M24 of each channel is completely independent, channel configuration flexibility
- Image high frequency and RF local oscillator MCU technique are used, frequency stability and high accuracy
- The function of each integrated circuit chips are used, the whole high reliability
- High-quality power supply, 7x24 hour stability


Specification

Frequency	47~862MHz
Output Level	$\geq 105\text{dB } \mu\text{V}$
Output Level Adj. Range	0~-20dB (Adjustable)
A/V Ratio	-10dB~-30dB (Adjustable)
Output Impedance	75 Ω
Spurious Output	$\geq 60\text{dB}$

Frequency Accuracy	$\leq \pm 10\text{KHz}$
Output Return Loss	$\geq 12\text{dB}$ (VHF) ; $\geq 10\text{dB}$ (UHF)
Video Input Level	1.0Vp-p (87.5% Modulation)
Input Impedance	$75\ \Omega$
Differential Gain	$\leq 5\%$ (87.5% Modulation)
Differential Phase	$\leq 5^\circ$ (87.5% Modulation)
Group Delay	$\leq 45\ \text{n s}$
Visual Flatness	$\pm 1\text{dB}$
Depth Adjust	0~90%
Video S/N	$\geq 55\text{dB}$
Audio Input Level	1Vp-p ($\pm 50\text{KHz}$)
Audio Input Impedance	$600\ \Omega$
Audio S/N	$\geq 57\text{dB}$
Audio Pre- emphasis	$50\ \mu\text{s}$
Rack	19 Inch standard


2 Operating Instructions

2.1 The front panel

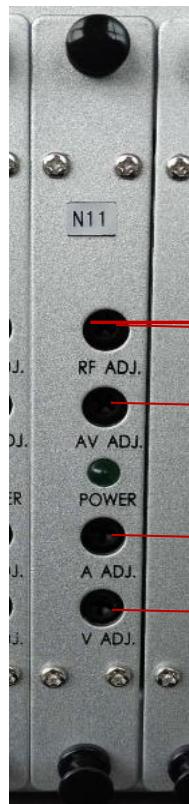

1. RF output level adjustment---Knob, adjustable RF output level
2. AV ratio adjustment---Knob adjusts the output of the A / V ratio
3. volume adjustment---Knob to adjust the output volume size
4. brightness adjustment---Knob to adjust the brightness of the output image

2.2 Rear Panel

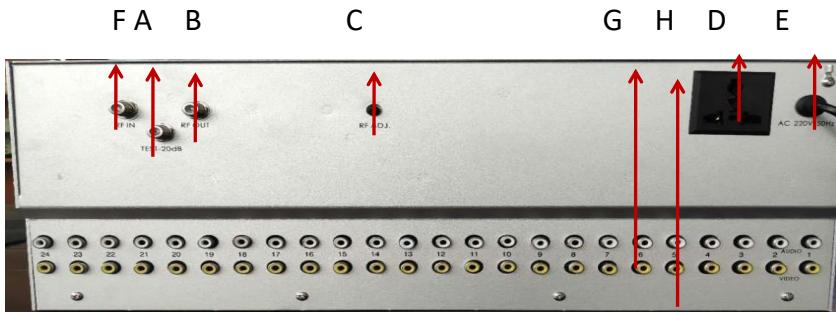

A. Output test port

Video output test port,-20dB;

B. RF output

Multiplexer module modulated, after mixing the RF output;

C. RF output regulation

Knob, adjustable RF output level;

D. Power cascade output

Superposition of multiple modulators, you can cascade output therefrom to other power modulator to reduce power outlet occupation; careful not to cascade more than 5 to avoid excessive current.

E. Power Input

Power Input: AC 220V 50Hz/110V 60Hz;

F. RF input

G. audio input

H. Video Input

Each module video input.

Note: After installation of the modulator to be more than 10 minutes on the electric machine and then adjust the parameters!