



for

LED



GooLED

GooLED-CRE-11050 Pin Fin Heat Sink Φ 110mm for Cree


Features VS Benefits

- * The GooLED-CRE-11050 Cree Pin Fin LED Heat Sinks are specifically designed for luminaires using the Cree LED engines.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 2,000 to 5,500 lumen.
- * Thermal resistance range R_{th} 1.47°C/W.
- * Modular design with mounting holes foreseen for direct mounting of Cree® XLamp® COB series.
- * Diameter 110mm - standard height 50mm Other heights on request.
- * Forged from highly conductive aluminum.



Zhaga LED engine and radiator assembly is a unified future international standardization

- * Below you find an overview of Cree COB's and LED modules which standard fit on the Pin Fin LED Heat Sinks.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED Pin Fin LED Heat Sink.

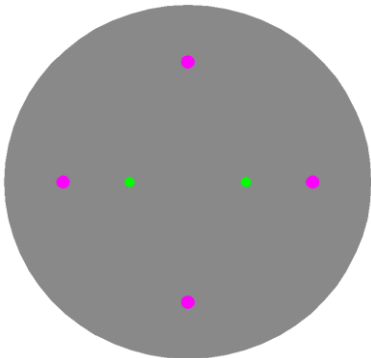

Cree LED Modules directly Mounting Options

Cree® XLamp® COB Series:

- Xlamp CXA 25xx;
- Xlamp CXB 25xx;

With the Zhaga Book 3 holders for the green indicator marks.
 IDEAL Holder:50-2102CR;
 BJB Holder:47.319.2141.50;
 AAG.STUCCHI holder:8401-G2;
 Direct mounting with machine screws M3x6.5mm.

With the LEDiL products:

- Olivia series: FN14637-S; FN14828-M;
- Ronda series: FN15xxx-xx;
- Stella Series: FN13xxx-xx; FN14xxx-xx; FN15xxx-xx;
- Stella Series mounting hole for the pink indicator marks.
- Direct mounting with machine screws M4x8.5mm.

Cree® XLamp® COB Series:

- Xlamp CXA 18xx;
- Xlamp CXB 18xx;

With the Zhaga Book 3 holders for the green indicator marks.
 IDEAL Holder:50-2101CR;
 BJB Holder:47.319.2131.50;
 Direct mounting with machine screws M3x6.5mm.

With the LEDiL products:

- Olivia series: FN14637-S; FN14828-M;
- Ronda series: FN15xxx-xx;
- Stella Series: FN13xxx-xx; FN14xxx-xx; FN15xxx-xx;
- Stella Series mounting hole for the pink indicator marks.
- Direct mounting with machine screws M4x8.5mm.



GooLED

GooLED-CRE-11050 Pin Fin Heat Sink Φ 110mm for Cree

Mounting Options and Drawings & Dimensions

Example:GooLED-CRE-11050-B-1,2

Example:GooLED-CRE-110 **1** - **2** - **3**

1 Height (mm)

2 Anodising Color

B-Black

C-Clear

Z-Custom

3 Mounting Options - see graphics for details Combinations available




Ex.order code - 12

means option 1 and 2 combined

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.

MOUNTING OPTION	Module type	Holder NO.	LEDiL products			THREAD	THREAD DEPTH	THREAD HOLE DISTANCE
			Stella Series	Olivia series	Ronda series			
1	Xlamp CXA 18xx; Xlamp CXB 18xx;	BJB Holder 47.319.2131.50	FN13xxx-xx; FN14xxx-xx; FN15xxx-xx;	FN14637-S; FN14828-M;	FN15xxx-xx;	M3	6.5mm	35.0mm/ 2-@180° (Zhaga Book 3)
		IDEAL Holder 50-2101CR						
	BJB Holder 47.319.2141.50							
	AAG.STUCCHI 8401-G2							
	Xlamp CXA 25xx; Xlamp CXB 25xx;	IDEAL Holder 50-2102CR						
2	LEDiL Lens	/	Stella Series	/	/	M4	8.5mm	75.0mm/ 4-@90°

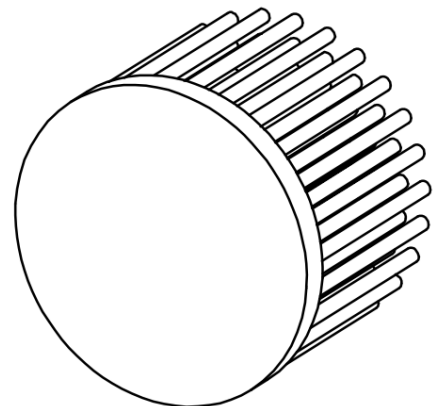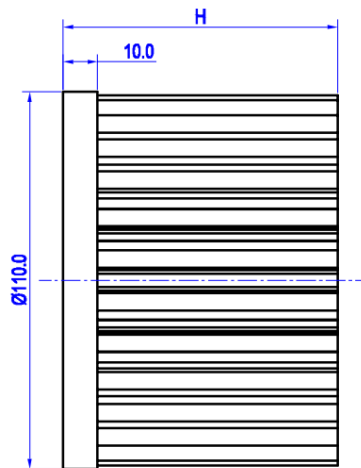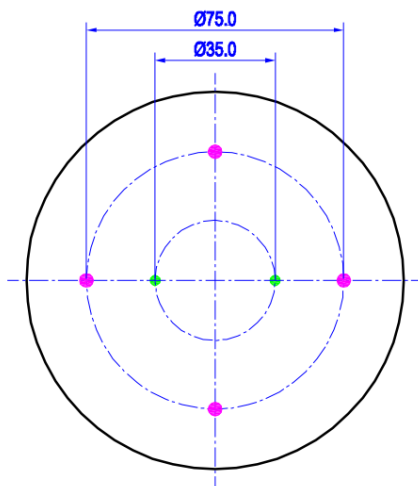

GooLED

GooLED-CRE-11050 Pin Fin Heat Sink $\Phi 110\text{mm}$ for Cree

The product data table

	Model No.	GooLED-CRE-11050
	Heatsink Size	$\Phi 110 \times H50\text{mm}$
	Heatsink Material	AL1070
	Finish	Black Anodized
	Weight (g)	463.0
	Dissipated power (T _{hs-amb} , 50°C)	34.0 (W)
	Cooling surface area (mm ²)	83372
	Thermal Resistance (R _{hs-amb})	1.47 (°C/W)


The thermal data table

* Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.

* To calculate the dissipated power please use the following formula: $P_d = P_e \times (1 - \eta_L)$.

Pd - Dissipated power ; Pe - Electrical power ; η_L = Light efficiency of the LED module;


Dissipated Power Pd(W)	Pd = Pe x (1- η_L)	Heat sink to ambient thermal resistance R _{hs-amb} (°C/W)	Heat sink to ambient temperature rise T _{hs-amb} (°C)
		GooLED-CRE-11050	
8.0		2.25	18.0
16.0		1.81	29.0
24.0		1.63	39.0
32.0		1.50	48.0
40.0		1.40	56.0

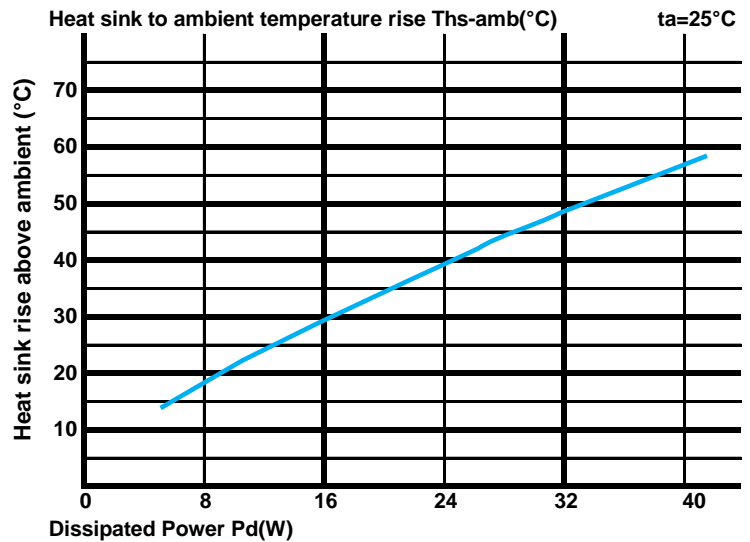

*The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).

MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.

Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



*Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a heat flow.

Geometric shapes are different, the thermal resistance is different. Formula: $\theta = (T_{hs} - T_a) / P_d$

θ - Thermal Resistance [°C/W] ; T_{hs} - Heatsink temperature ; T_a - Ambient temperature ;

*The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package outer shell is R_{junction-case}, the thermal resistance of the TIM outside the package is R_{interface (TIM)} [°C/W], the thermal resistance with the heat sink is R_{heatsink-ambient} [°C/W], and the ambient temperature is T_{ambient} [°C].

*Thermal resistances outside the package R_{interface (TIM)} and R_{heatsink-ambient} can be integrated into the thermal resistance R_{case-ambient} at this point. Thus, the following formula is also used:

$$T_{\text{junction}} = (R_{\text{junction-case}} + R_{\text{case-ambient}}) \cdot P_d + T_{\text{ambient}}$$