



for

LED



GooLED

GooLED-BRI-4850 Pin Fin LED Heat Sink Φ 48mm for Bridgelux


Features VS Benefits

- * The GooLED-BRI-4850 Bridgelux Pin Fin LED Heat Sinks are specifically designed for luminaires using the Bridgelux LED engines.
- * Mechanical compatibility with direct mounting of the LED engines to the LED cooler and thermal performance matching the lumen packages.
- * For spotlight and downlight designs from 500 to 1,600 lumen.
- * Thermal resistance range Rth 5.0°C/W.
- * Modular design with mounting holes foreseen for direct mounting of Bridgelux V Series™, Vero® SE Series, Vero® Series, H Series™ and Vesta™ Series LED engines.
- * Diameter 48mm - standard height 50mm Other heights on request.
- * Forged from highly conductive aluminum.



Zhaga LED engine and radiator assembly is a unified future international standardization

- * Below you find an overview of Bridgelux COB's and LED modules which standard fit on the Pin Fin LED Heat Sinks.
- * In this way mechanical after work and related costs can be avoided, and lighting designers can standardize their designs on a limited number of LED Pin Fin LED Heat Sink.

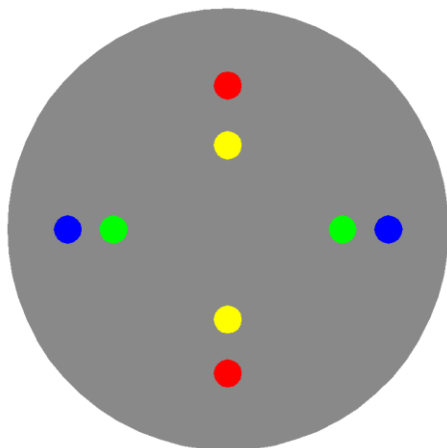

Bridgelux LED Modules directly Mounting Options

Bridgelux V8, V10, V13 LED Array Series:

- BXRE-20xxxxx-x-xx; BXRE-40xxxxx-x-xx;
- BXRE-27xxxxx-x-xx; BXRE-50xxxxx-x-xx;
- BXRE-30xxxxx-x-xx; BXRE-57xxxxx-x-xx;
- BXRE-35xxxxx-x-xx; BXRE-65xxxxx-x-xx;

V13 LED Array Serie with the BJB holder: 47.319.2025.50, Blue indicator marks.
 V10 LED Array Serie with the BJB holder: 47.319.6060.50, Green indicator marks.
 V8 LED Array Serie with the Bridgelux holder, yellow indicator marks.
 Direct mounting with machine screws M3x6.5mm.

With the LEDiL products:
 Olivia series: FN14637-S;
 Ronda series: FN15xxx-xx;

Bridgelux Vero® Series Vero 10, Vero 13 LED Array and Vero® SE Series Vero 10 SE, Vero 13 SE LED Array

- BXRC-27xxxxx-x-xx; BXRC-50xxxxx-x-xx;
- BXRC-30xxxxx-x-xx; BXRC-57xxxxx-x-xx;
- BXRC-35xxxxx-x-xx; BXRC-65xxxxx-x-xx;
- BXRC-40xxxxx-x-xx;

With the Bridgelux Holder:
 Direct mounting with machine screws M3x6.5mm.
 Vero 10 for the yellow indicator mark, Vero 13 for the red & blue indicator mark.

With the LEDiL products:
 Olivia series: FN14637-S; FN14828-M;
 Ronda series: FN15xxx-xx;

Bridgelux® H Series™ H6, H9 LED Array:

- BXRH-27xxxxx-x-xx; BXRH-35xxxxx-x-xx;
- BXRH-30xxxxx-x-xx; BXRH-40xxxxx-x-xx;

With the Zhaga Book 11 Holders:
 BJB holder: 47.319.6120.50; 47.319.6104.50;
 Direct mounting with machine screws M3x6.5mm, Green indicator marks.
 With the LEDiL products: Ronda series: FN15xxx-xx;

Bridgelux® Vesta™ Series Dim-To-Warm 9mm Array

BXRV-DR-1830H-1000-x-13;
 With the Zhaga Book 11 Holders:
 BJB holder: 47.319.6180.50;
 Direct mounting with machine screws M3x6.5mm, Green indicator marks.





GooLED

GooLED-BRI-4850 Pin Fin LED Heat Sink Φ 48mm for Bridgelux

Mounting Options and Drawings & Dimensions

Example:GooLED-BRI-4850-B-1,2


Example:GooLED-BRI-48 **1** - **2** - **3**

- 1** Height (mm)
- 2** Anodising Color
B-Black
C-Clear
Z-Custom
- 3** Mounting Options - see graphics for details Combinations available
Ex.order code - 12
means option 1 and 2 combined

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.


MOUNTING OPTION	Module type	Holder NO.	LEDiL products		THREAD	THREAD DEPTH	THREAD HOLE DISTANCE
			Olivia series	Ronda series			
1	Vero 10	Bridgelux	/	/	M3	6.5mm	19.0mm/ 2-@180°
	Vero SE 10		/	/			
	V8		/	/			
2	V10	BJB Holder 47.319.6060.50	/	FN15xxx-xx;	M3	6.5mm	25.0mm/ 2-@180° (Zhaga book 11)
	Vesta™ Series 9mm	BJB Holder 47.319.6180.50	/	/			
	H6	BJB Holder 47.319.6120.50	/	/			
	H9	BJB Holder 47.319.6104.50	/	FN15xxx-xx;			
3	Vero 13	Bridgelux	FN14637-S;	FN15xxx-xx;	M3	6.5mm	31.4mm/ 2-@180°
4	Vero SE 13		FN14828-M;	FN15xxx-xx;	M3	6.5mm	35.0mm/ 2-@180° (Zhaga book 3)
	V13	BJB Holder 47.319.2025.50		FN15xxx-xx;	M3	6.5mm	

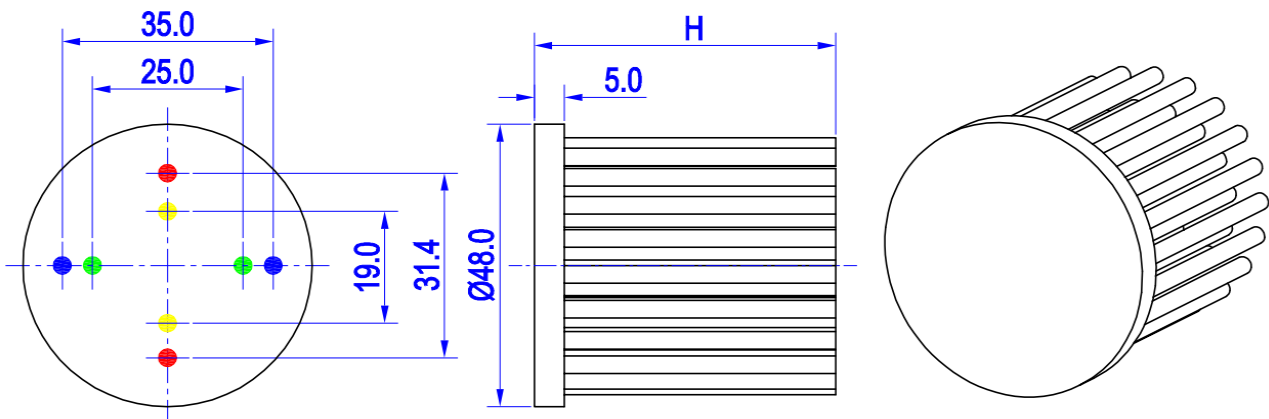

GooLED

GooLED-BRI-4850 Pin Fin LED Heat Sink Φ 48mm for Bridgelux

The product data table

	Model No.	GooLED-BRI-4850
	Heatsink Size	Φ 48xH50mm
	Heatsink Material	AL1070
	Finish	Black Anodized
	Weight (g)	64.0
	Dissipated power (Ths-amb,50°C)	10.0 (W)
	Cooling surface area (mm²)	24285
	Thermal Resistance (Rhs-amb)	5.0 (°C/W)


The thermal data table

* Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.

*To calculate the dissipated power please use the following formula: $P_d = P_e \times (1 - \eta_L)$.

Pd - Dissipated power ; Pe - Electrical power ; η_L = Light efficiency of the LED module;

Dissipated Power Pd(W)	Pd = Pe x (1- η_L)	Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature rise Ths-amb (°C)
		GooLED-BRI-4850	
2.0		7.00	14.0
4.0		6.25	25.0
6.0		5.67	34.0
8.0		5.38	43.0
10.0		5.00	50.0

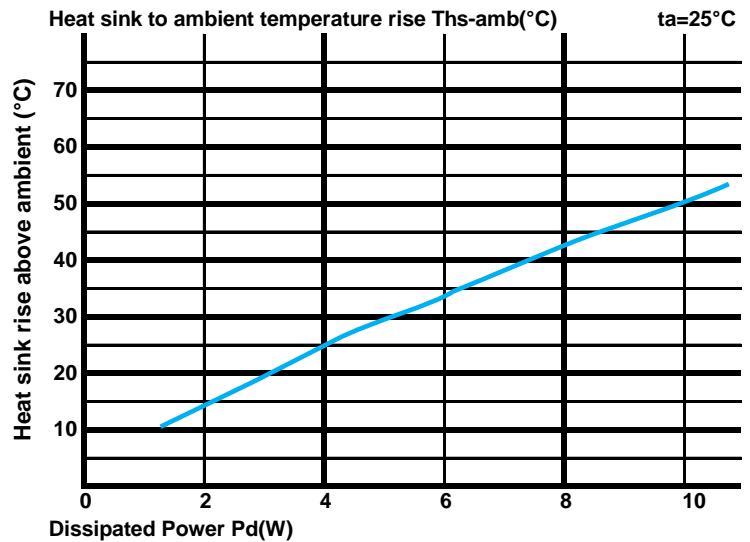

*The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).

MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.

Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



*Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a heat flow.

Geometric shapes are different, the thermal resistance is different. Formula: $\theta = (Ths - Ta) / Pd$

θ - Thermal Resistance [°C/W] ; Ths - Heatsink temperature ; Ta - Ambient temperature ;

*The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package outer shell is $R_{junction-case}$, the thermal resistance of the TIM outside the package is $R_{interface (TIM)}$ [°C/W], the thermal resistance with the heat sink is $R_{heatsink-ambient}$ [°C/W], and the ambient temperature is $T_{ambient}$ [°C].

*Thermal resistances outside the package $R_{interface (TIM)}$ and $R_{heatsink-ambient}$ can be integrated into the thermal resistance $R_{case-ambient}$ at this point. Thus, the following formula is also used:

$$T_{junction} = (R_{junction-case} + R_{case-ambient}) \cdot Pd + T_{ambient}$$