



CR34615E 3.0V



Equivalent:D

**Electrical characteristers**

Typical values relative to cells stored for one year

Nominal capacity	12000mAh
Discharged capacity at 10mA,+25°C,2V cut off.	
Nominal voltage	3.0V
Max. recommended continuous current	2000mA
Discharged to 2V at + 25°C permitting 50% of the Nominal capacity to be achieved	
Max. Pulse current	3000mA
15 seconds at 25°C drained with 50% of the nominal capacity ,yield voltage reading above 2V. The value may vary with the pulse characteristics,the temperature and the cell's previous history.	
Storage	Max. 30°C
Operating temperature range	-20~+60°C
Weight	≈125g

**Warning**

Don't charge,crush,disassemble,expose contents to water,heat above 100°C or may lead to explosion, burn or goods leakage.Discarded battery should be buried deeply to the ground.

**Key features**

- High and stable operating voltage
- Long shelf life Annual self-discharge rate lower than 2% at +20°C
- Stainless steel nickel plated
- Hermetic Sealing
- Compliant with IEC 86-4 safety standard
- Non-restricted for transport
- UL Component Recognition File Number MH46165



**Main applications**

- Alarms or security equipment
- Smoke detector
- Memory backup
- Real time clock
- Professional electronic equipment
- Medical equipment

.....

# CR34615E 12000mAh

## Discharge characteristics at 25°C

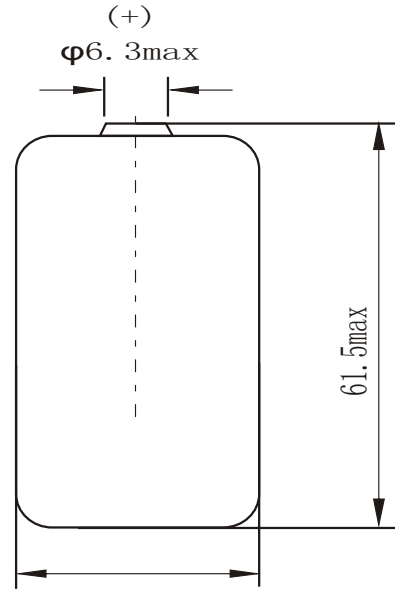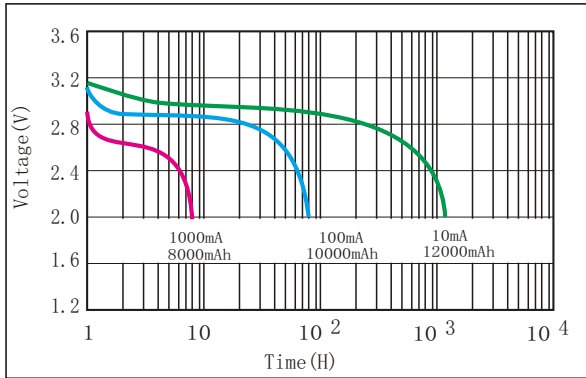

$\phi 34.0 \text{max}$


Dimensions in mm

### Available Terminations


- /P Axial pin
- /T/PT2 Radial Pin
- /PT/TP Polarized Tab

Special terminal can be made according to customer's requirement


## Voltage VS Current & Temperature Curve

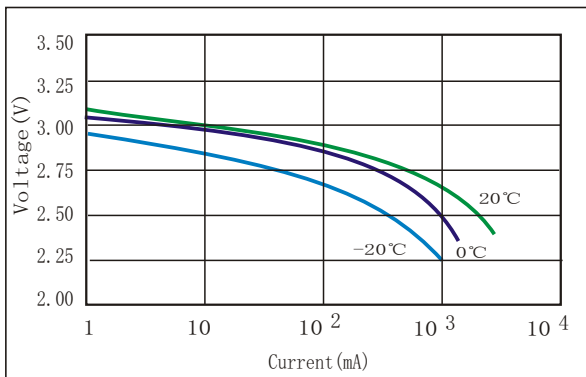

## Capacity VS Current & Temperature Curve

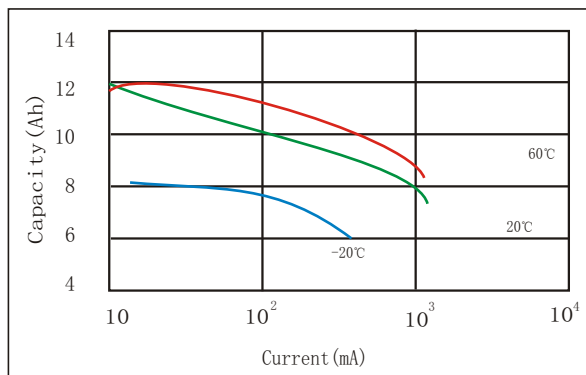

## Storage characteristics

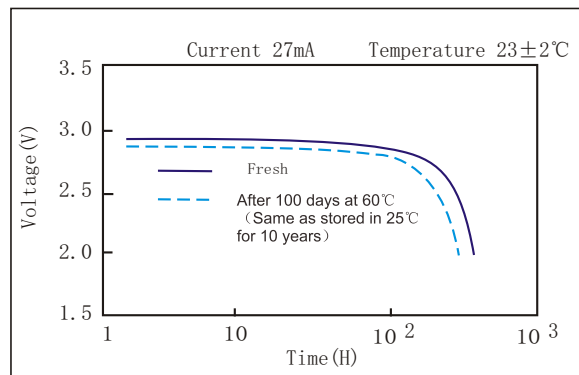

WUHAN FANSO TECHNOLOGY CO.,LTD.

Address: No.1 Sitai Industrial Park, Yongfeng Avenue, Hanyang District, Wuhan City, China.

Tel: 86-27-84458099 / 84452919

Fax: 86-27-84453116

Post code: 430051