


GD-3200AE-S2/M2

Eco Solvent Printer



Piezoelectric Print Head Variable Ink Droplet

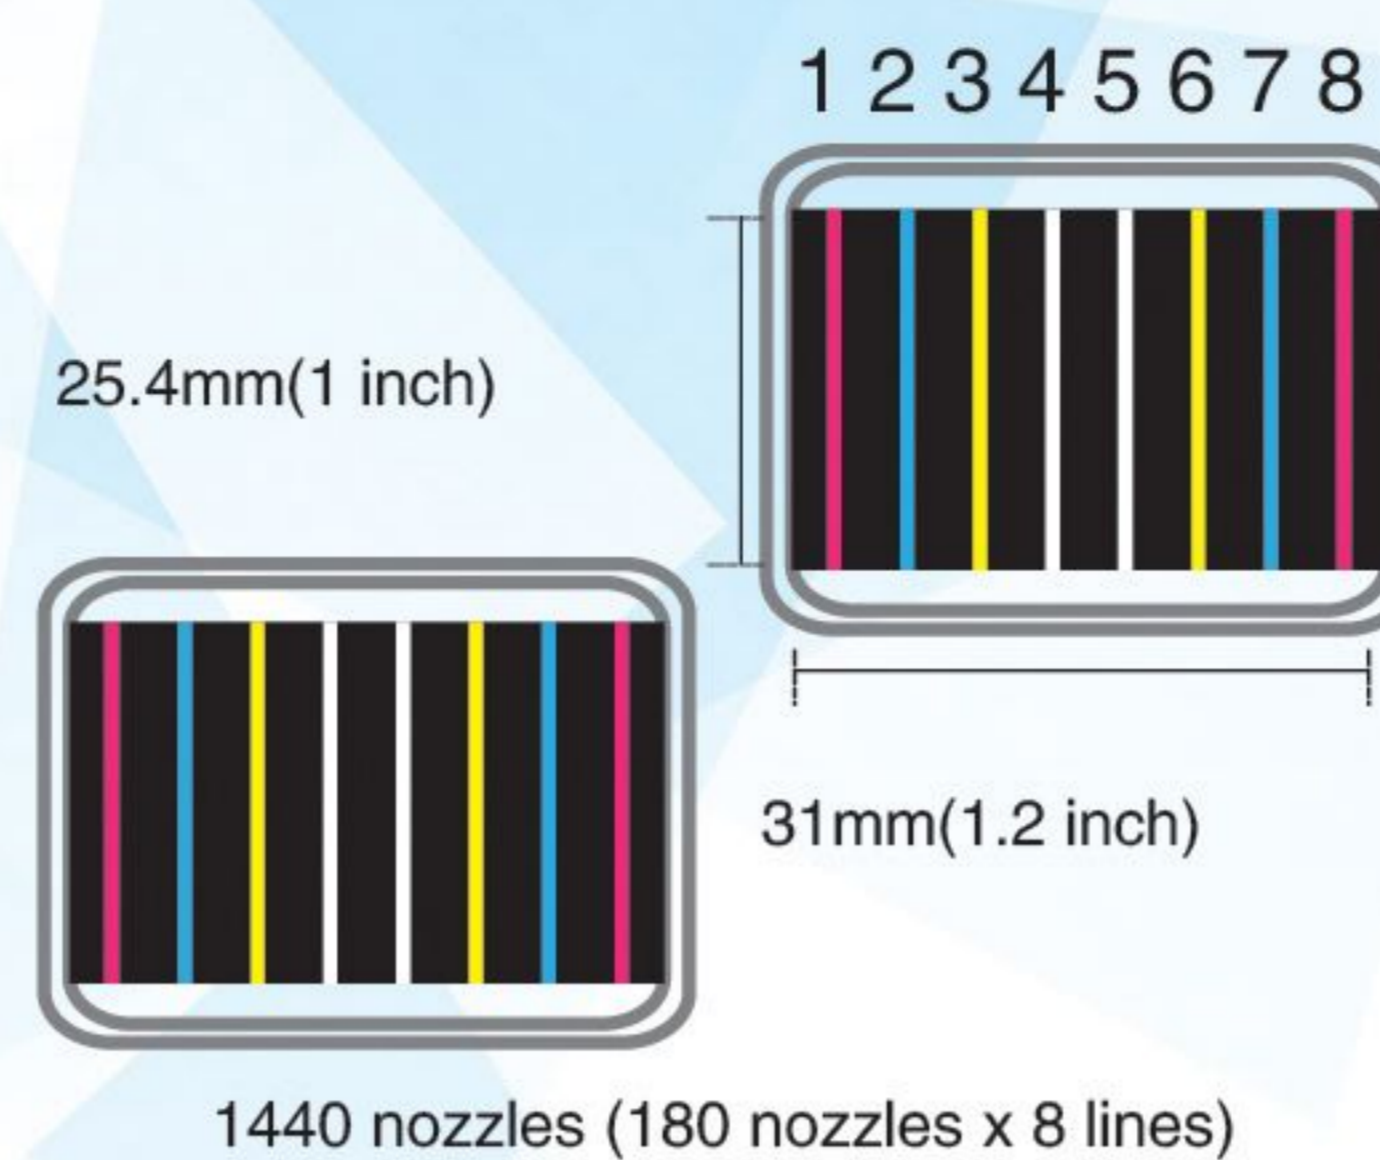


Stable Bulk System Ensures Amazing Printing Speed



Perfect Media Feed & Roll System

SPECIFICATIONS

Model	GD-3200AE-S2/M2	
Print Head	Dual DX5 Print Heads	
Printing Technology	Piezoelectric Inkjet	
Acceptable Media	Width	128 in.(3250 mm)
	Thickness	Maximum 59 mil(1.5 mm)
	Weight	176 lb.(80 kg)
Printing Width	126 in.(3200 mm)	
Ink Cartridges	Type	Eco Solvent Ink
	Capacity	4*4 CISS (220ml ink cartridge with 1.5L ink tank) 6*6 CISS (6 color), 8*8 CISS (8 color) optional
	Color	4 colors (Cyan, Magenta, Yellow, Black) 6 colors, 8 colors optional
Printing Resolution	Maximum 1440 dpi	
Printing Speed	4pass(720x720dpi): 430 sqft (40 sqm/h)	
	6pass(720x1080dpi): 290 sqft (27 sqm/h)	
	8pass(720x1440dpi): 215 sqft (20 sqm/h)	
Media Heating System	Intergrated tri-heater system	
Interface	USB 2.0	
Power Supply	AC 220V ± 10%, 50/60 HZ	
Dimensions(with stand)	180(W)x38.1(D)x62.1(H) in. (4580(W)x970(D)x1580(H) mm)	
Weight(with stand)	1102 lb. (500 kg)	
Package Dimensions	186.3(W)x44.8(D)x68.8(H) in. (4740(W)x1140(D)x1750(H) mm)	
Package Weight	1433 lb. (650 kg)	
Environment	Power on	Temperature: 59 ℉ to 90 ℉ [15℃ to 32℃] / Humidity: 35 to 80% (no condensation)
	Power off	Temperature: 41 ℉ to 104 ℉ [5℃ to 40℃] / Humidity: 20 to 80% (no condensation)
Accessories	USB cable, media clamp, manual, drain bottle, ink cartridges, RIP software, etc.	

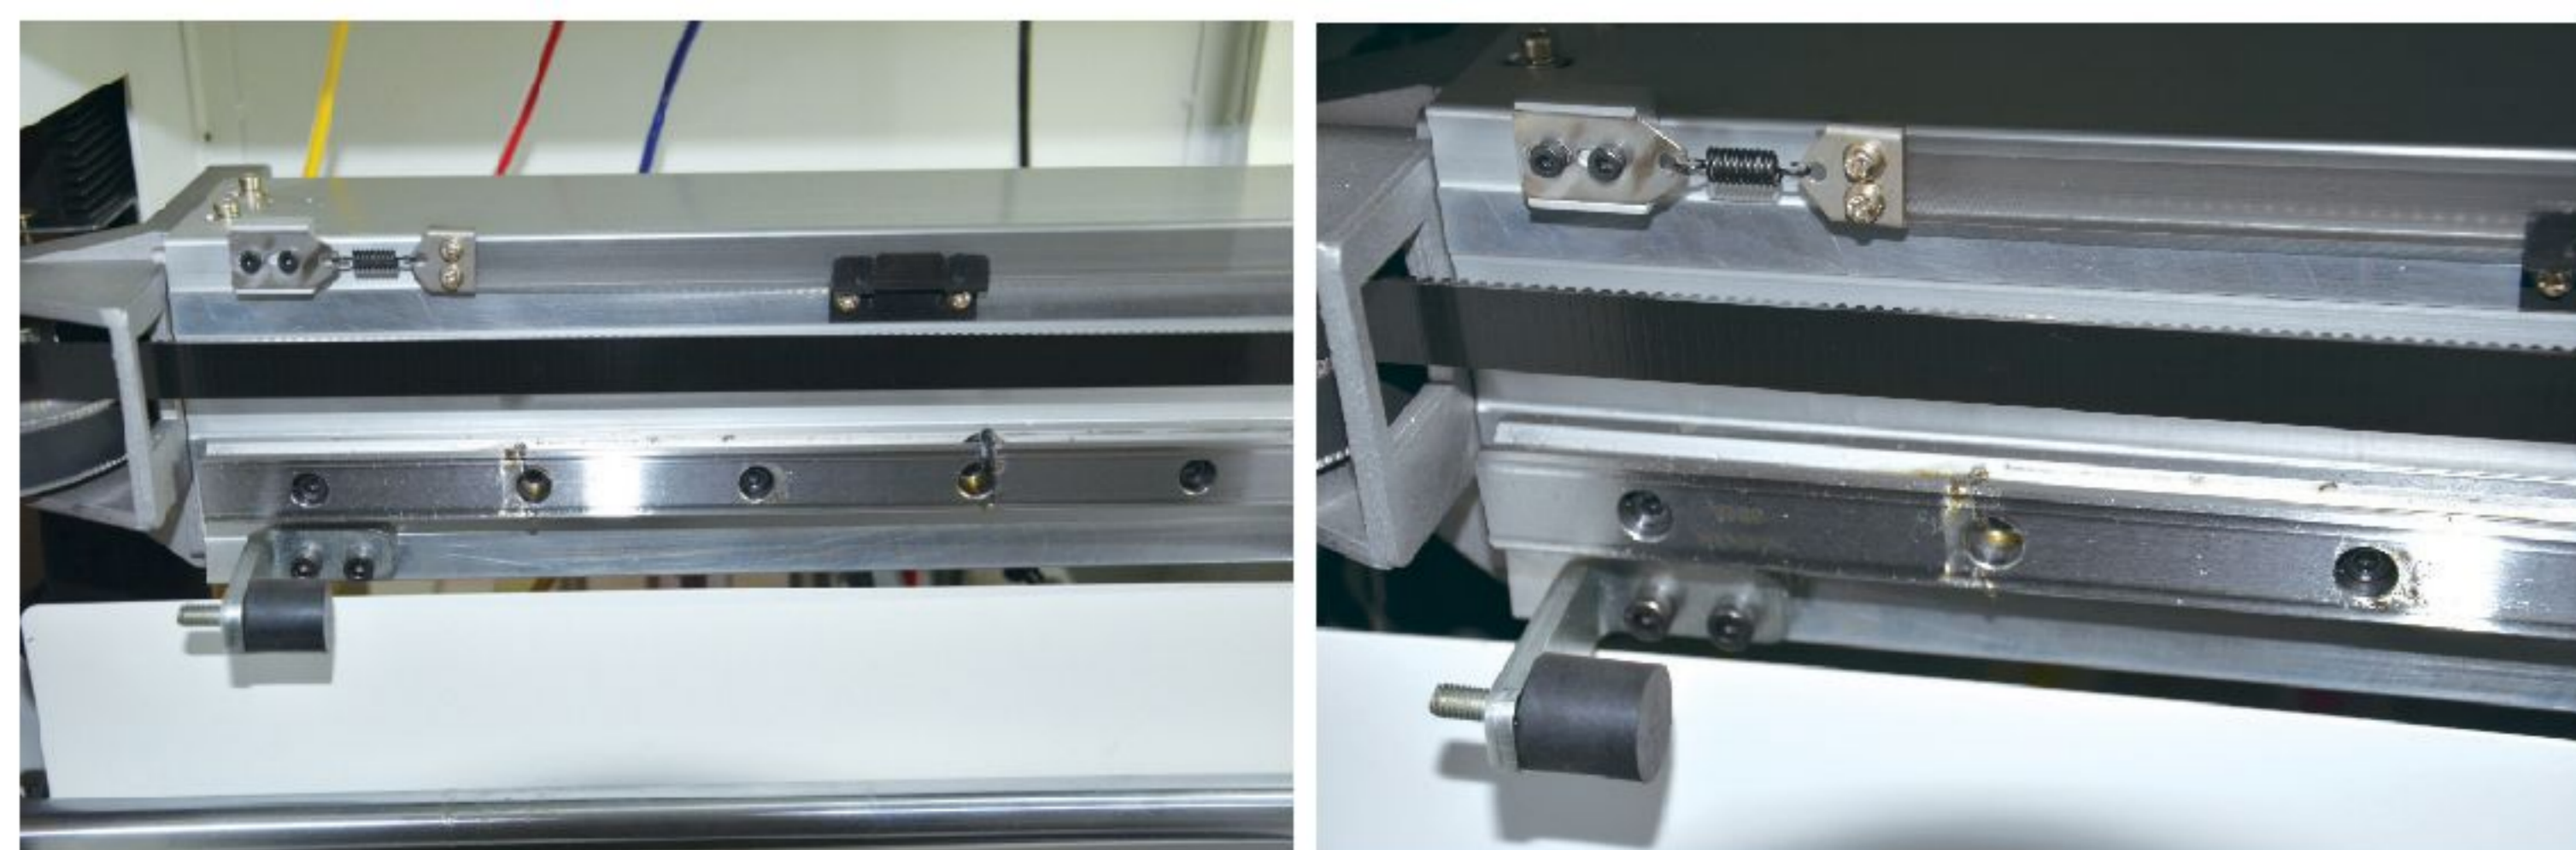

High Stability, High Durability