

# Bench-Top Type Temperature (& Humidity) Chamber





● Main technical parameters

● Temperature fluctuation:  $\leq \pm 0.5\text{ }^{\circ}\text{C}$

Temperature uniformity:  $\leq 2.0\text{ }^{\circ}\text{C}$

● Temperature deviation:  $\leq \pm 2.0\text{ }^{\circ}\text{C}$

Ambient temperature:  $+5\sim +35\text{ }^{\circ}\text{C}$

● Power(V): AC  $380\pm 10\%\text{V}$   $50\text{HZ}\pm 0.5\text{HZ}$

Ambient temperature:  $+5\sim +35\text{ }^{\circ}\text{C}$

● Equipment noise:  $\leq 69\text{dB}$

(testing from one meter in f/ront of the door)

● Standard configuration: Electrothermal film glass observation 2 pcs ;

Standard configuration: Electrothermal film glass observation 2 pcs ;  
Cable hole ( $\Phi 100$ ) 1 PCS; sample shelf 2 kits; Lighting 1 pcs; Sample  
power control terminal 1 (C), only C type equipment equipment with this.

● Implementation standards

● GB/T5170.2-2008 Temperature test equipment


● GB/T2423.1-2008(IEC68-2-1) testing A, Low temperature test method

● GB/T2423.2-2008(IEC68-2-2) testing B, High temperature test method

● GJB150.3A-2009(MIL-STD-810F-2000) High Temperature test

● GJB150.9A-2009(MIL-STD-810F-2000) thermal humidity test (C)

● Temperature and humidity control chart

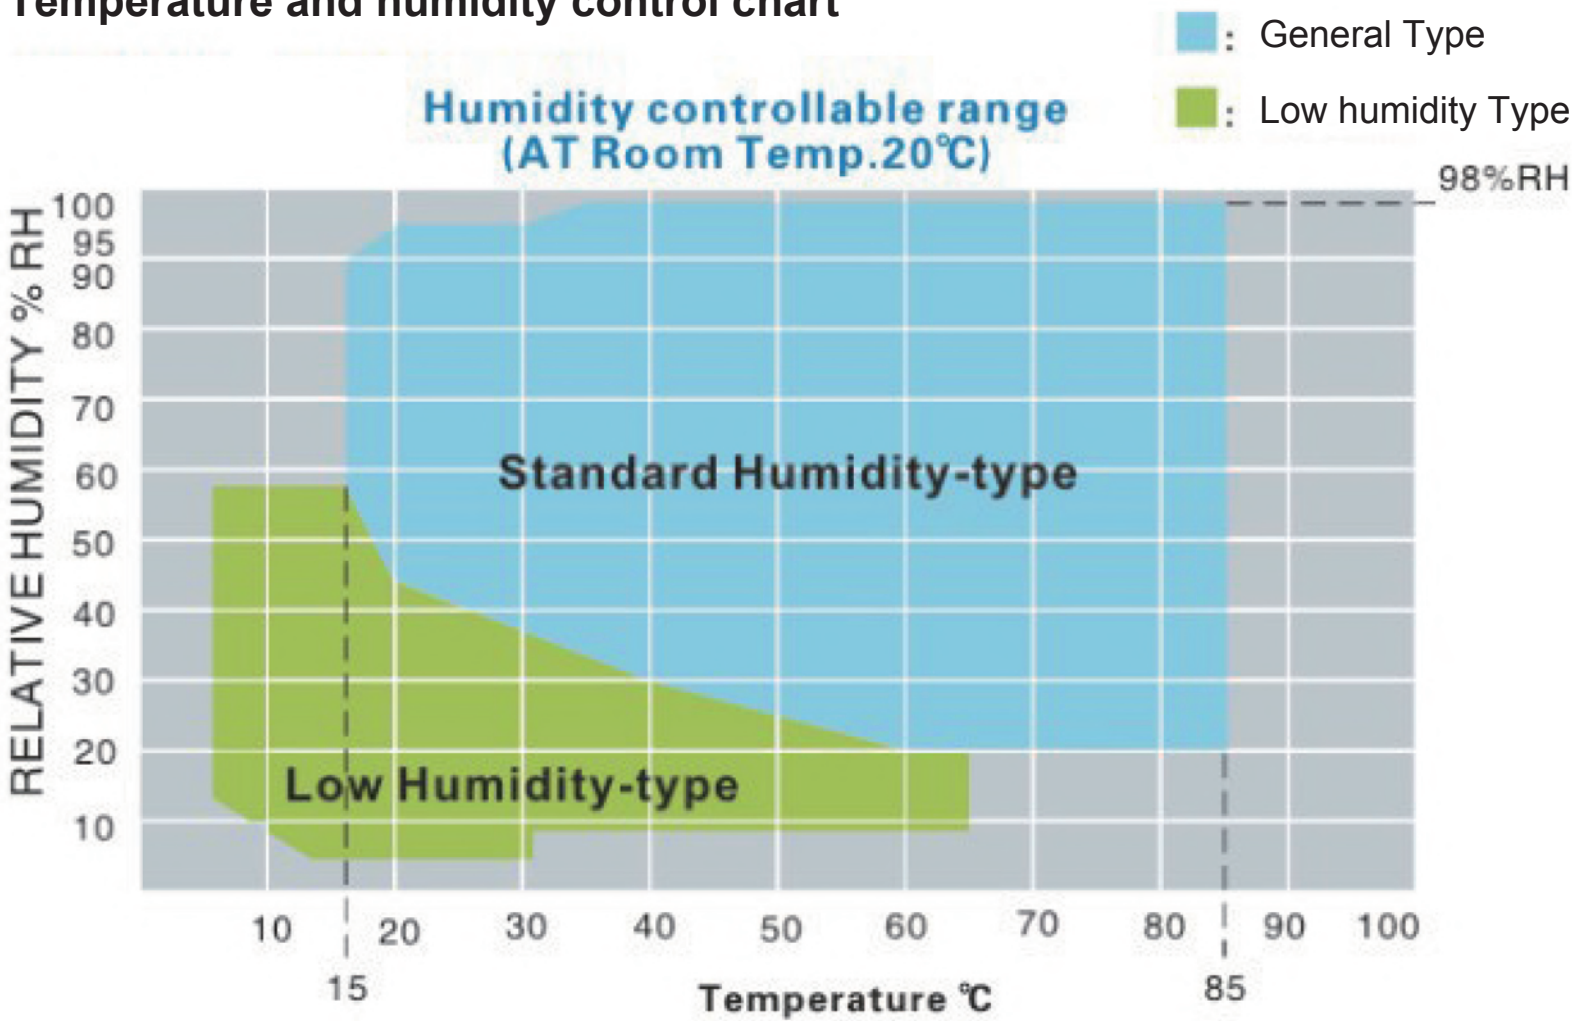

Model			SH-222	SH-242	SH-262	SH-642	SH-662	SH-242-5
System			Balanced Temperature & Humidity Control system (BTHC system)					
Temp. performance <sup>*1</sup>	Temp. range		−20 to +150℃ (−4 to +302°F)	−40 to +150℃ (−40 to +302°F)	−60 to +150℃ (−76 to +302°F)	−40 to +150℃ (−40 to +302°F)	−60 to +150℃ (−76 to +302°F)	−40 to +150℃ (−40 to +302°F)
	Temp. fluctuation		±0.3℃ (−20 to +100℃ ) ±0.5℃ (+100.1 to +150℃ )	±0.3℃ (−40 to +100℃ ) ±0.5℃ (+100.1 to +150℃ )	±0.3℃ (−60 to +100℃ ) ±0.5℃ (+100.1 to +150℃ )	±0.3℃ (−40 to +100℃ ) ±0.5℃ (+100.1 to +150℃ )	±0.3℃ (−60 to +100℃ ) ±0.5℃ (+100.1 to +150℃ )	±0.3℃ (−40 to +100℃ ) ±0.5℃ (+100.1 to +150℃ )
	Temp. gradient / Temp. variation in space		2.5℃ (−20 to +100℃ ) 4.0℃ (+100.1 to +150℃ )	2.5℃ (−40 to +100℃ ) 4.0℃ (+100.1 to +150℃ )	2.5℃ (−60 to +100℃ ) 4.0℃ (+100.1 to +150℃ )	2.5℃ (−40 to +100℃ ) 4.0℃ (+100.1 to +150℃ )	2.5℃ (−60 to +100℃ ) 4.0℃ (+100.1 to +150℃ )	2.5℃ (−40 to +100℃ ) 4.0℃ (+100.1 to +150℃ )
	Temp. rate of change	Heat up rate	3.2℃ /min.			2.9℃ /min.		5.0℃ /min.
		Pull down rate	2.1℃ /min.			1.7℃ /min.		5.0℃ /min.
	Temp. extreme achievement time Heat up time		From −20 to +150℃ within 55 min.	From −40 to +150℃ within 60 min.	From −60 to +150℃ within 70 min.	From −40 to +150℃ within 70 min.	From −60 to +150℃ within 80 min.	From −40 to +150℃ within 40 min.
	Temp. extreme achievement time Pull down time		From +20 to −20℃ within 20 min.	From +20 to −40℃ within 50 min.	From +20 to −60℃ within 70 min.	From +20 to −40℃ within 60 min.	From +20 to −60℃ within 90 min.	From +20 to −40℃ within 20 min.
	Lowest attainable temp.		−20℃	−40℃	−60℃	−40℃	−60℃	−40℃
Humid. performance <sup>*1</sup>	Humid. range		30 to 95% rh (Refer to diagram on page 12)					
	Humid. fluctuation		±3.0% rh					
Construction	Heater		Nichrome strip wire heater					
	Humidifier		Stainless steel cartridge heater					
	Refrigeration unit	System	Mechanical single-stage refrigeration system		Mechanical cascade refrigeration system			
		Cooler	Plate fin cooler					
		Refrigerator	Hermetically sealed compressor, Air-cooled condenser, Expansion mechanism: Capillary tube system					
		Refrigerator capacity	400W		[Unit 1: 400W ×1, Unit 2: 400W ×1]			
		Refrigerant	R404A		R23, R404A			
Capacity		22.5 L			64 L		22.5 L	
Chamber total load resistance		20 kg						
Inside dimensions mm (inch) <sup>*2</sup>		W300×H300×D250 (W11.81×H11.81×D9.84)			W400×H400×D400 (W15.75×H15.75×D15.75)		W300×H300×D250 (W11.81×H11.81×D9.84)	
Outside dimensions mm (inch) <sup>*2</sup>		W440×H690×D695 (W17.32×H27.18×D27.36)		W440×H690×D785 (W17.32×H27.18×D30.91)	W540×H730×D920 (W21.26×H28.74×D36.22)		W440×H690×D785 (W17.32×H27.18×D30.91)	
Weight		83 kg (78 for 100V type)		105 kg	130 kg		106 kg	
Utility requirements	Allowable ambient conditions		+5 to +35℃ (+41 to +95°F)					
	Power supply <sup>*3</sup>	100V AC 1 ϕ50/60Hz	14.5 A		18.0 A	21.0 A		21.0 A
		115V AC 1 ϕ60Hz	14.0 A		————			
		200V AC 1 ϕ50/60Hz <sup>*4</sup>	————		14.0 A	14.5 A		15.5 A
		220V AC 1 ϕ50/60Hz <sup>*5</sup>	10.0 A		13.5 A	14.0 A		15.0 A
		230V AC 1 ϕ50Hz <sup>*5</sup>	9.5 A		13.5 A	14.0 A		15.0 A
Noise level <sup>*6</sup>		Between 42 and 52 dB		Between 42 and 56 dB	Between 48 and 59 dB		Between 42 and 56 dB	
Exhaust heat quantity		3500 kJ/h (836 kcal/h)		4000 kJ/h (955 kcal/h)	5040 kJ/h (1204 kcal/h)		5700 kJ/h (1361 kcal/h)	

CLIMATE STSAR series has advanced features in terms of quality and reliability

### Customer first

1. If you have ever used environmental test equipment, you will soon feel the unique design and ease of use of the device CLIMATE STSAR.

2. First of all, you can feel the equipment is easy to use, low maintenance rate and high reliability

3. Then, You can choose different the testing volume, temperature range and special parts to meet your special requirements

### Products Features



The CLIMATE STAR series products have excellent design and high quality standard features.

1. Large viewing angle and full heating observation window
2. High stability full color touch screen
3. Pin holes on both sides
4. Sample holder capable of conveniently adjusting height
5. Triple independent over temperature protection
6. Safety sample terminal
7. High quality casters for the equipment easily level shift
8. Ultra quiet
9. Disassemble operation panel for easy maintenance

### Scope of application

1. This model is a simulation products in climate field, it's combination of temperature conditions (high and low temperature operation & storage, temperature cycle, high temperature, low temperature, condensation test) testing the product whether it has any changes in the ability and the characteristic.

2. Must meet the requirements of the international standard( IEC, JIS , GB, MIL---) to achieve the consistency of the international measurement procedures.

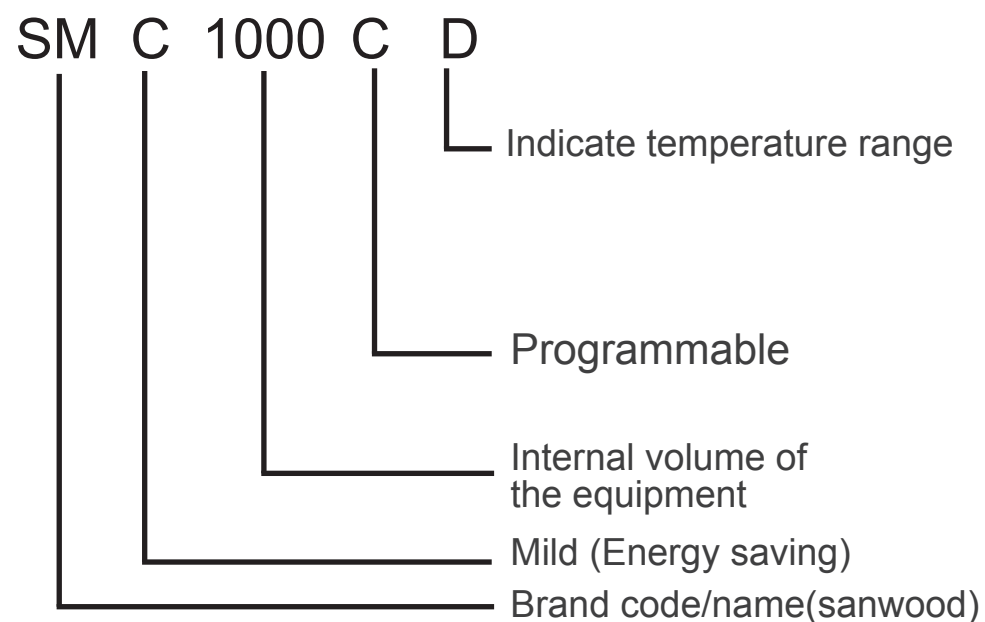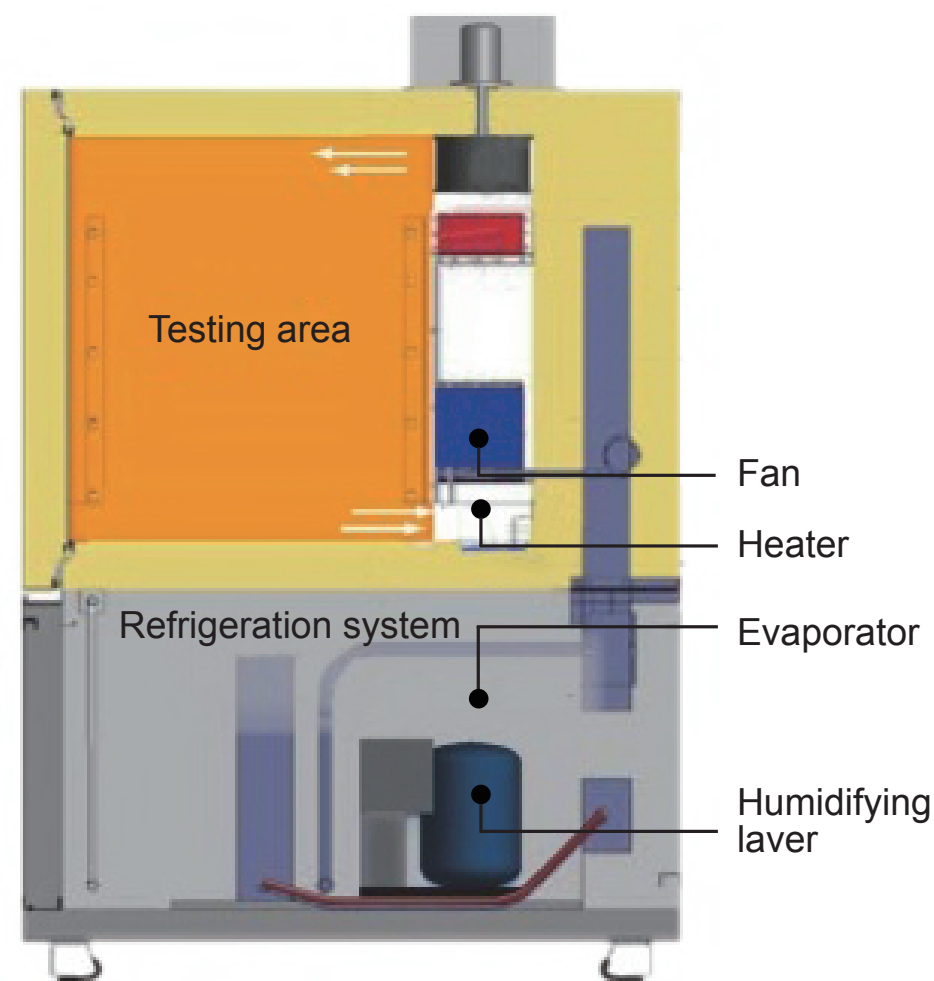

### ● *Structure characteristics*

1. Shell: Spray galvanized color steel plate, the surface electrostatic spray processing.
2. Liner: stainless steel SUS 304.
3. Thermal insulation layer: Polyurethane foam board and glass fiber.
4. Seal: Toshiba high purity silicon rubber raw materials, effectively prevent aging.
5. Heater: Ni Cr alloy electric heater.
6. Humidifier: Outer tube: SUS316 stainless steel seamless pipe Internal heating wire: Ni Cr alloy wire.
7. Sample holder: 40kg/ layer \* 2 layer ( standard configuration )  
80kg/ layer ; 120kg/ layer  
Total bearing  $\leq$  240 kg (optional).

Pin hole



Φ100mm (standard equipment)  
Φ50mm Φ80mm Φ160mm  
(optional equipment)

Operation sample hole on the glass  
(No display on the picture)



Inner glass door (optional)





## ● Refrigeration design

1. Modular production, reliable quality, convenient maintenance.
2. Silver brazing welding vibration pipe with a silver content of 45% to prevent the welding leak effectively.
3. Adequate space position, easy to operate.
4. Welding through nitrogen, ensure the inner pipe not nitriding.
5. Take a variety of techniques to decouple shock.
6. Take a variety of techniques to anti-corrosive.



### Compressor



France Taikang compressor  
(Original import)

### Pressure relay



America EMERSON or Denmark  
DANFOSS

### Evaporator

Custom efficient fin type heat exchanger

### Solenoid valve



Italy CASTEL

### Refrigerant

R404A

R23(-70)

Ozone depletion index was 0

### Denmark DANFOSS brand



1. condenser
2. evaporator condenser(-70)
3. Evaporation pressure regulating valve
4. Thermal expansion valve
5. Dry filter
6. Condensation pressure regulating valve ( water-cold)

Controller




- 1. 5.7" 640\*480 lattice. TFT LCD displayer
- 2. 1200 programs , program can cycle
- 3. RS - 485 interface, with remote communication function.
- 4. SD card storage test data, about 7500 days ( Sampling period: 5min)
- 5. operating language: Chinese or English

Recorder( option)



- 1. Large screen LED display
- 2. High reliability of industrial records requirements

The sample power control terminal



- 1. When the equipment safety protection device works,the power supply of the electrified sample is controlled through the connecting terminal.

Safety protection device

1.Compressor



- 1.1 Compressor overpressure
- 1.2 Compressor motor overheating
- 1.3 Compressor motor over-current
- 1.4 Condenser fan overheating ( air-cold)
- 1.5 Cooling circulating water pressure shortag (water-cold).

2. Test samples of protection



- 2.1 Adjustable overtemperature protection.
- 2.2 Air conditioning channel over temperature limit.
- 2.3 controller set overtemperature shut down alarm.
- 2.4 sample terminal protection.

3. Electric control

- 3.1 The fan motor overheating.
- 3.2 Total power phase sequence and lack of phase protection.
- 3.3 Leakage protection.
- 3.4 Load short circuit protection.



# The Experience you Rely on...

Sanwood Environmental Chambers was established in 1995, which integrated Taiwan and Japan technologies. We have been focus on the most secure and reliable climatic test chamber technology since established. And has become a private science and technology enterprises in Dongguan,Guangdong Province, which passed the ISO9001:2008 quality system certification.

Our products upgrade constantly and our customers come portable batteries, power batteries, battery, lithium batteries, lead-acid, new energy vehicles, electric bicycles, electric tools, electric systems, solar, military, universities research and other technology industries fields.


Having experienced nearly 20 years efforts, we have successfully developed a series of products:

- High and low temperature test chamber
- explosion-proof type thermal shock chamber
- an explosion-proof type temperature test box
- walk-in temperature and humidity chamber
- weather resistance test chamber
- battery thermal abuse test box
- explosion-proof type hot box
- Temperature&humidity&Vibration integrated test chamber
- dust test box
- vibration table
- rain test chamber
- ozone test box
- xenon lamp test chamber
- high temperature oven
- seawater immersion box

All of products meet GB31241、IE62133、QCT/743、UN38.3、UL2054 Standard. And we have had a good cooperation with ATL, Sony, Sunwoda, Desay, Samsung, BYD, Toyota, Yutong Bus, Nissan, Guangdong Province entry-exit, Tsinghua University, Henan University, Chinese Academy of Sciences, Central South University Successively.

## Enterprise vision:

Sanwood Technology has established a large production base in Dongguan after many years efforts. The plant area reached more than 12000 square meters. The foreign trade branch and foreign service agencies were established in 2010. And branches successively established in Taiwan, Suzhou, Hunan, Hubei, Beijing, Henan. Excellent products and good after-sales service make us won the recognition and trust of customers. Products are exported to more than 30 countries, such as Russia, Singapore , the United States, Turkey, Denmark, Vietnam, India, Malaysia, Kazakhstan, Austria, Canada, etc. In the age with fierce competitions, Sanwood thrived little by little and aims to become the leading brand in the safety and reliability environmental test equipment industry all over the world.

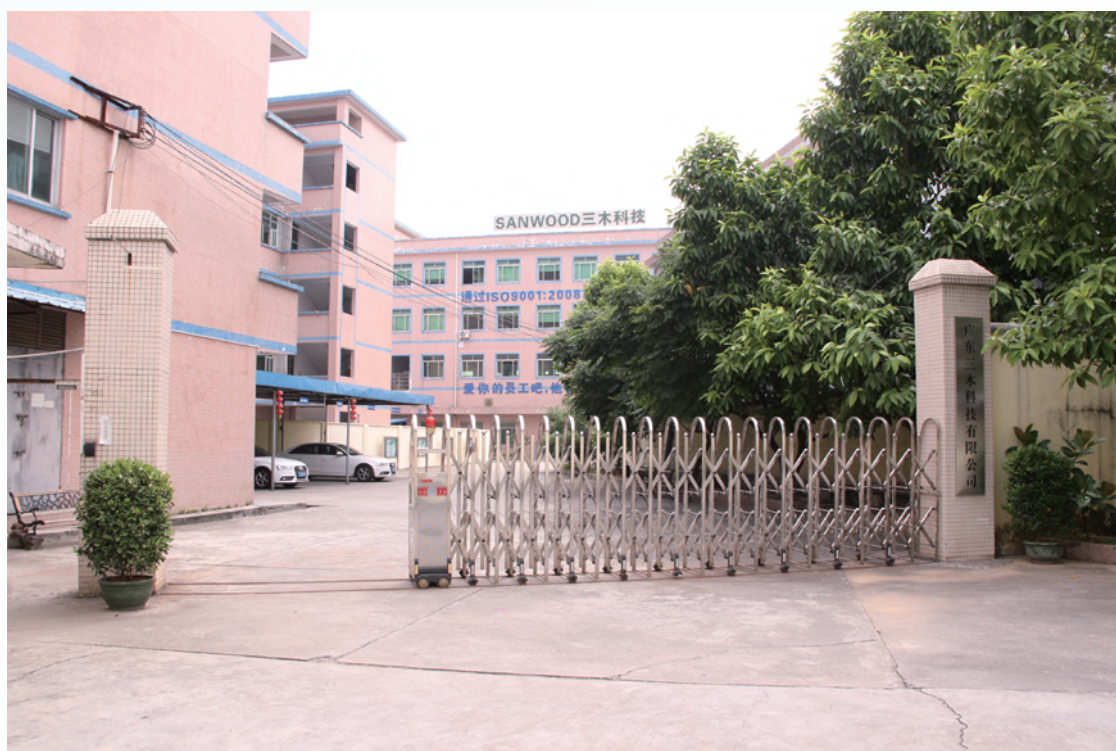

Focusing on the innovation of environmental reliability test

Sanwood(HK)Industrial Corporation.,Limited  
Guang dong Sanwood Technology Corporation.,limited

ADD:Changping Science&Technology park,Changping,  
Dongguan city,Guangdong province,China

TEL:+86+769-81182799

FAX:+86+769-82987199

E-mail:info@climatic-chambers.com.tw

www.climatic-chambers.com.tw

www.environmental-chambers.ru