



EtraLED

EtraLED-7080 Modular Passive LED Star Heat Sink Φ 70mm

Features VS Benefits

* Mechanical compatibility with direct mounting of the LED modules to the LED cooler and thermal performance matching the lumen packages.

* Thermal resistance range R_{th} 1.8°C/W.

* Modular design with mounting holes foreseen for direct mounting of a wide range of LED modules and COB's:

* Diameter 70mm - Standard height 80mm , Other heights on request.

* Extruded from highly conductive aluminum.

2 standard colors - clear anodised - black anodised

Zhaga Book 3 Spot Light Modules Xicato ,Edison , Osram , Bridgelux , Citizen , Cree ,Lumileds , Tridonic , Seoul , LG ,Vossloh ,Lustrous , Prolight ,Samung ,SHARP , Luminus ,Philips



- 1) Xicato XSM, XIM,XTM;(XSA-307,XSA-308)
- 2) Bridgelux ES Rectangle Array Series Vero 13 and Vero18 COB engines.
- 3) Citizen CLL022-CLU024, CLL032-CLU034;
- 4) Cree XLamp CXA13xx, CXA15xx,CSA18xx;
- 5) Lumileds Luxeon COB's 1203, 1204, 1205, Luxeon K arrays K12, K16;
- 6) Osram Soleriq S13, S19, E30
- 7) Seoul Semiconductor ZC6, ZC12, ZC18,ZC25;
- 8) Tridonic TALEXXmodule SLE nodules engines.
- 9) LG Innotek LEMWM18 10W, 13W, 17W
- 10) Edison EdiLex SLM and EdiLex II COB LED engines.
- 11) Lustrous LUSTRON 6 series LL604F, LL608D, LL613F, LL620F
- 12) Prolight Opto PABS, PABA, PACB, PANA
- 13) Samung LC013,LC019,LC026 COB LED engines.
- 14) SHARP Mini Zenigata,Tiger Zenigataand and Mega Zenigata LED engines.
- 15) Philips Fortimo SLM LED engines.
- 16) Vossloh-Schwabe LUGA Shop LED engines.
- 17) Luminus C##9,C##14 LED engines.

Order Information

Example:EtaLED-7080-B-#

Example:EtaLED-70 1 - 2 - 3

1 Hight (mm)

2 Anodising Color

B-Black

C-Clear

Z-Custom

3 Mounting Options - see graphics for details Combinations available

Ex.order code - 12

means option 1 and 2 combined

MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler. Either thermal grease, a thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



Tel:+86-769-39023131

E-fax: +86-(020)28819702 ext22122

Http://www.heatsinkled.com

Http://www.mingfatech.com




EtraLED

EtraLED-7080 Modular Passive LED Star Heat Sink Φ 70mm

The thermal data table

	<p><i>EtraLED-7080</i></p>
Model No.	EtaLED7080
Size	Φ70x80mm
Material	6063-T5
Finish	Black Anodized
Weight(gr)	308
Thermal Wattage	28.1W
HeatsinkΘs-a²	124837
Heat Sink RiseT <small>Rise Above Ambient (°C/W)</small>	1.8

Dissipated Power Pd(W)	Pd = Pe x (1-ηL)	Heat sink to ambient thermal resistance Rhs-amb (°C/W)	Heat sink to ambient temperature riseThs-amb (°C)
		EtraLED-7080	EtraLED-7080
5W		2.8	13
15W		2.35	24
20W		2.15	32
25W		1.92	39
30W		1.8	53

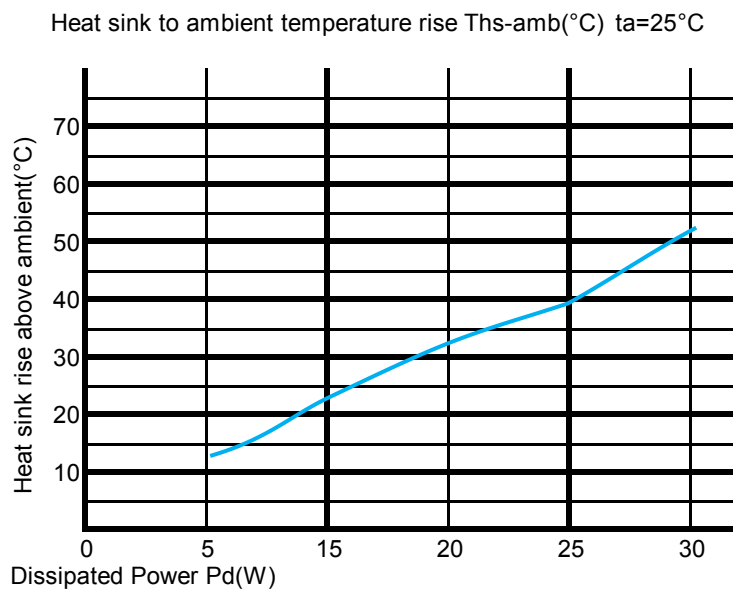

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.