



for

LED



GooLED

GooLED-8650 Pin Fin LED Heat Sink Φ86.5mm

Features VS Benefits

- \* Mechanical compatibility with direct mounting of the LED modules to the LED cooler and thermal performance matching the lumen packages.
- \* For spotlight and downlight designs from 1,600 to 4,400 lumen.
- \* Thermal resistance range Rth 1.85°C/W.
- \* Modular design with mounting holes foreseen for direct mounting of a wide range of LED modules and COB's:
- \* Diameter 86.5mm - Standard height 50.0mm , Other heights on request.
- \* Forged from highly conductive aluminum.
- \* 2 standard colors - clear anodised - black anodised.
- \* Zhaga Book 3 Spot Light modules: Bridgelux ,Cree ,Citizen ,Edison ,GE lighting, LG Innotek ,Lumileds ,Luminus ,Luminus ,Nichia ,Osram ,Philips ,Prolight Opto, Samsung ,Seoul ,Tridonic ,Vossloh-Schwabe ,Xicato.



- 01) Bridelux: Vero 18/22 Vero SE 18/29 LED engines;
- 02) Cree: XLamp CXA 25xx, XLamp CXB 25xx, CXA 30xx, XLamp CXB 30xx LED eng
- 03) Citizen: CLU036, CLU038, CLU721, CLU711, CLU046, CLU048, CLU731 LED engines;
- 04) Edison: EdiLex III COB LED engines;
- 05) GE lighting: Infusion™ LED engines;
- 06) LG Innotek: 32W, 42W, 56W LED engines;
- 07) Lumileds: LUXEON 1211, LUXEON 1216, LUXEON 1812, LUXEON 1825 LED eng
- 08) Lumens: Ergon-COB-2530, 2540, 3050, 3070 LED engines;
- 09) Luminus: CXM-18, CLM-22, CXM-22 LED engines;
- 10) Nichia: NFCWL036B, NFCLL036B, NFCWL060B, NFCLL060B LED engines;
- 11) Osram: SOLERIQ® S 19, Core series LED engines;
- 12) Philips: Fortimo SLM LED engines;
- 16) Prolight Opto: PABS, PABA, PACB, PANA LED engines;
- 13) Samsung: LC026B, LC033B, LC040B, LC040D, LC060D, LC080D LED engines;
- 14) Seoul Semiconductor: Acrich MJT COBs, DC COB LED engines;
- 15) Tridonic: SLE G6 19mm, SLE G6 23mm LED engines;
- 17) Vossloh-Schwabe: LUGA Shop and LUGA C LED engines;
- 18) Xicato: XSM, XIM, XTM LED engines;



Order Information

Example:GooLED-8650-B

Example:GooLED-8650-

- Anodising Color
- B-Black
- C-Clear
- Z-Custom

Notes:

- Mentioned models are an extraction of full product range.
- For specific mechanical adaptations please contact MingfaTech.
- MingfaTech reserves the right to change products or specifications without prior notice.



**GooLED**

**GooLED-8650 Pin Fin LED Heat Sink Φ86.5mm**


**The product data table**

	<b>Model No.</b>	GooLED-8650
	<b>Heatsink Size</b>	Φ86.5xH50mm
	<b>Heatsink Material</b>	AL1070
	<b>Finish</b>	Black Anodized
	<b>Weight (g)</b>	210.0
	<b>Dissipated power (T<sub>hs-amb</sub>,50°C)</b>	27.0 (W)
	<b>Cooling surface area (mm<sup>2</sup>)</b>	77577
	<b>Thermal Resistance (R<sub>hs-amb</sub>)</b>	1.85 (°C/W)


**The thermal data table**

- \* Please be aware the dissipated power Pd is not the same as the electrical power Pe of a LED module.
- \* To calculate the dissipated power please use the following formula: Pd = Pe x (1-ηL).
- Pd - Dissipated power ; Pe - Electrical power ; ηL = Light efficiency of the LED module;

Dissipated Power Pd(W)	Pd = Pe x (1-ηL)	Heat sink to ambient thermal resistance R <sub>hs-amb</sub> (°C/W)	Heat sink to ambient temperature rise T <sub>hs-amb</sub> (°C)
		GooLED-8650	
7.0		2.86	20.0
14.0		2.21	31.0
21.0		2.00	42.0
28.0		1.82	51.0
35.0		1.69	59.0

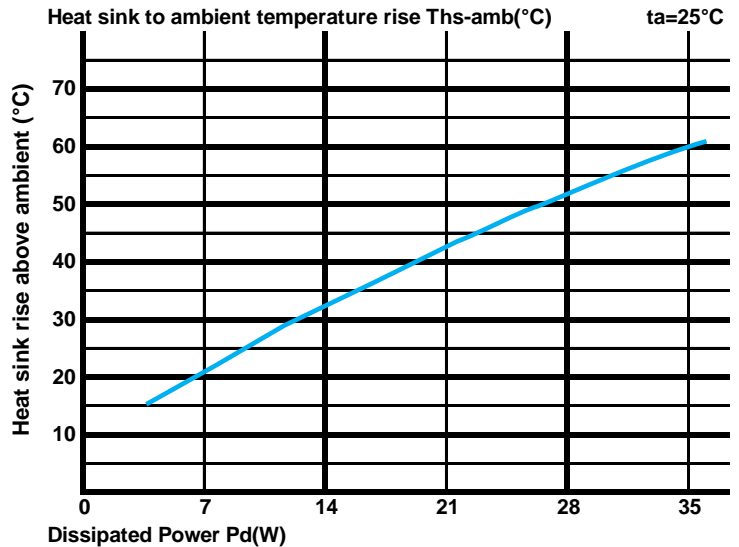

- \*The aluminum substrate side of the package outer shell is thermally connected to the heat sink via TIM (Thermal interface material).
- MingFa recommends the use of a high thermal conductive interface between the LED module and the LED cooler.
- Either thermal grease, A thermal pad or a phase change thermal pad thickness 0.1-0.15mm is recommended.



- \*Thermal resistance is a heat property and a measurement of a temperature difference by which an object or material resists a heat flow. Geometric shapes are different, the thermal resistance is different. Formula:  $\theta = (T_{hs} - T_a) / P_d$
- $\theta$  - Thermal Resistance [°C/W] ; T<sub>hs</sub> - Heatsink temperature ; T<sub>a</sub> - Ambient temperature ;
- \*The thermal resistance between the junction section of the light-emitting diode and the aluminum substrate side of the package outer shell is R<sub>junction-case</sub>, the thermal resistance of the TIM outside the package is R<sub>interface (TIM)</sub> [°C/W], the thermal resistance with the heat sink is R<sub>heatsink-ambient</sub> [°C/W], and the ambient temperature is T<sub>ambient</sub> [°C].
- \*Thermal resistances outside the package R<sub>interface (TIM)</sub> and R<sub>heatsink-ambient</sub> can be integrated into the thermal resistance R<sub>case-ambient</sub> at this point. Thus, the following formula is also used:
- $T_{junction} = (R_{junction-case} + R_{case-ambient}) \cdot P_d + T_{ambient}$