



3 Zone Thermal Shock Test Chamber



Energy Conservation

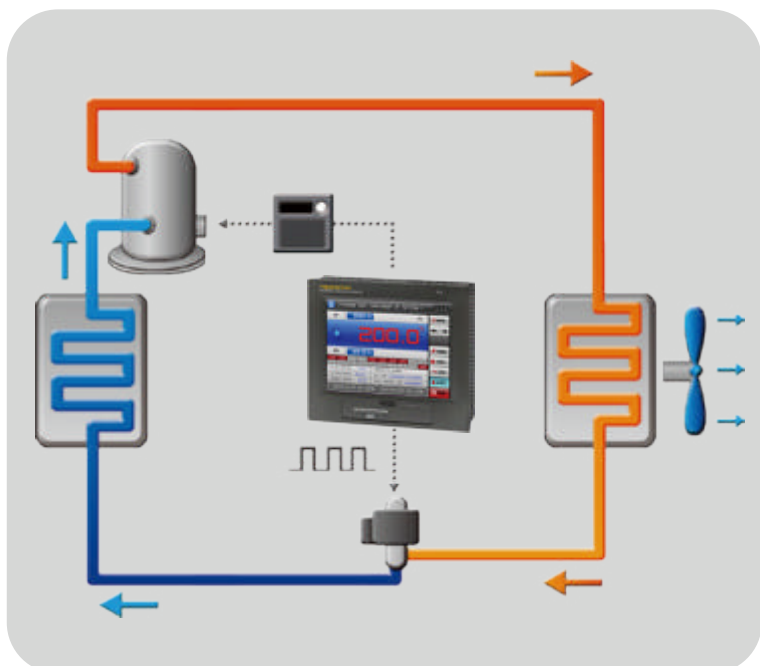


Remote network system

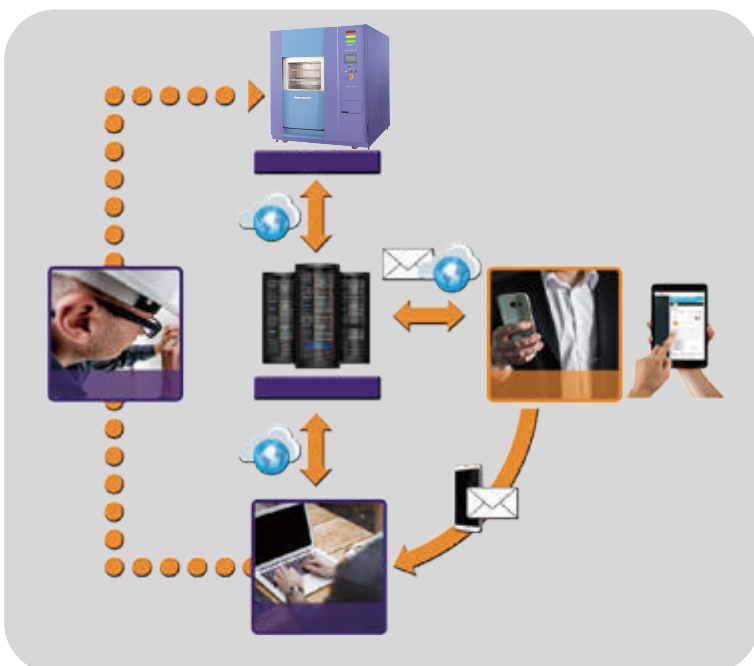

Circuit System



SANWOOD®
Environmental Test Chambers

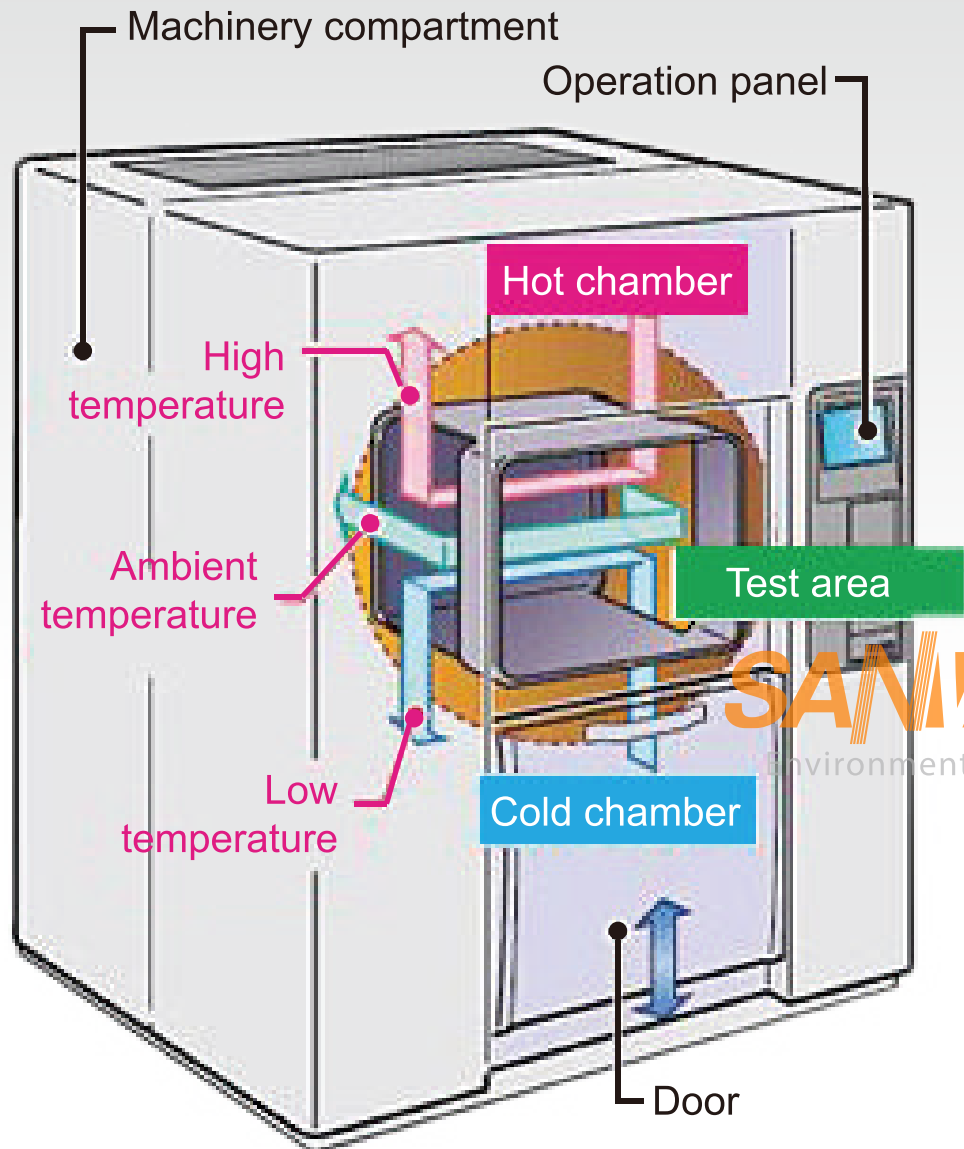

• Specifications

Model		SM-50-3P-A	SM-80-3P-A	SM-150-3P-A	SM-200-3P-A	SM-300-3P-A	SM-500-3P-A
Temperature	Temperature impact range	-55℃～150℃ （A:-40℃～150℃;B:-55℃～150℃； ）					
	Temperature fluctuation	±1.0℃					
	Low temperature precooling time	25.0℃～-70.0℃ Within 60 mins 1.0～3.0℃/min					
	High temperature preheating time	25.0℃～200.0℃ Within 60 mins 3.0～7.0℃/min					
	Temperature conversion time	3S					
	Temperature recovery time	Within 5 mins		SANWOOD®		Within 10 mins	
Material / components	Internal material	Stainless steel(SUS304)					
	External material	Cold rolled steel sheet / powder spraying					
	Heat insulating material	100mm thickness poly urethane plate+10mm thickness mineral wool					
	Fan	Centrifugal blower					
	Compressor	France Tecumseh, Germany Bock, Germany Bitzer					
	Condenser	Air cooling, water cooling			water cooling		
	Refrigerant	R404A、R23、R508					
	Evaporator	Fin - and - Tube Heat Exchanger					
Size	Heater	Nickel chromium alloy heating wire					
	Interior size(mm) W*H*D	350*400*350	400*500*400	500*600*500	650*460*670	960*460*670	960*650*800
	Outer size(mm) W*H*D	1400*1750*1750	1450*1850*1800	1550*2050*2050	1700*2000*2200	2050*2000*2250	2050*2150*2450
	Volume (L)	50L	80L	150L	200L	300L	500L
Operating ambient temperature		+5 ~ 35℃					
Power supply		380V AC 50/60Hz					
Controller		SANWOOD SH5600:Equipped with RS232 port; （7.0 inch controller) USB data export)					

Sanwood (HK) Industrial Corporation.,limited
Guangdong Sanwood Technology Corporation.,limited

ADD: No.88, Songchang Road, Songbotang , Changping, Dongguan, Guangdong
TEL: +86+769-81182799
FAX: +86+769-82987199
E-mail: info@sanwood.cc
www.sanwood.cc
www.climatic-chambers.com



Mobile phone scan
can visit our official website