



Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E



## APPLICATION FOR EMC DIRECTIVE

On Behalf of

**Shenzhen Qinhan Lighting Co.,Limited**

**led street light**

**Trade Name:**



**Model: QH-STL-LDB-150W, QH-STL-LDB-50W, QH-STL-LDB-60W,  
QH-STL-LDB-70W, QH-STL-LDB-80W, QH-STL-LDB-90W,  
QH-STL-LDB-100W, QH-STL-LDB-120W**

**Prepared For :** **Shenzhen Qinhan Lighting Co.,Limited**

A building, Chuangze Industrial City, Dalang Town, Dongguan, Guangdong, China.

**Prepared By :** **TMC Testing Services (Shenzhen) Co., Ltd.**

1/F., Block A, Xinshidai Gongrong Industrial Park, No. 2, Shihuan Road, Shilong Community, Shiyan Street, Baoan District, Shenzhen, China

Tel: +86-755- 86642861

Web: [www.tmc-lab.com](http://www.tmc-lab.com)

E-mail: [Cert@tmc-lab.com](mailto:Cert@tmc-lab.com)

Date of Test: August 29, 2019-September 02, 2019

Date of Report: September 05, 2019

Report Number: TMC190828104-E



## TABLE OF CONTENTS

<b>TEST REPORT DECLARATION.....</b>	<b>5</b>
<b>1. TEST RESULTS SUMMARY.....</b>	<b>6</b>
<b>2. GENERAL INFORMATION.....</b>	<b>7</b>
2.1. Report information.....	7
2.2. Measurement Uncertainty.....	7
<b>3. PRODUCT DESCRIPTION.....</b>	<b>8</b>
3.1. EUT Description.....	8
3.2. Block Diagram of EUT Configuration.....	8
3.3. Operating Condition of EUT.....	8
3.4. Test Conditions.....	8
3.5. Modifications.....	8
3.6. Abbreviations.....	9
3.7. Performance Criterion.....	9
<b>4. TEST EQUIPMENT USED.....</b>	<b>10</b>
4.1. For Conducted Emission Test.....	10
4.2. For Magnetic Test (In Shielding Room).....	10
4.3. For Harmonic / Flicker Test.....	10
4.4. For Electrostatic Discharge Immunity Test.....	10
4.5. For RF Strength Susceptibility Test.....	10
4.6. For Electrical Fast Transient/Burst Immunity Test.....	10
4.7. For Surge Test.....	10
4.8. For Injected Currents Susceptibility Test.....	10
4.9. For Magnetic Field Immunity Test.....	11
4.10. For Voltage Dips and Interruptions Test.....	11
<b>5 RADIATED EMISSION TEST.....</b>	<b>12</b>
5.1 Test Standard.....	12
5.1 Radiated Emission Limit.....	12
5.2 EUT Configuration on Test.....	12
5.3 Operating Condition of EUT.....	13
5.4 Test Procedure.....	13
5.5 Test Results.....	13
<b>6. POWER LINE CONDUCTED EMISSION TEST.....</b>	<b>14</b>
6.1. Block Diagram of Test Setup.....	14
6.2. Test Standard.....	14
6.3. Power Line Conducted Emission Limit.....	14
6.4. EUT Configuration on Test.....	14
6.5. Operating Condition of EUT.....	15
6.6. Test Procedure.....	15
6.7. Test Result.....	15
<b>7. MAGNETIC TEST.....</b>	<b>16</b>
7.1. Block Diagram of Test Setup.....	16
7.2. Test Standard.....	16
7.3. Magnetic Field Emission Limits.....	16
7.4. EUT Configuration on Test.....	16
7.5. Operating Condition of EUT.....	16
7.6. Test Procedure.....	17

7.7. Test Results.....	17
<b>8. HARMONIC CURRENT EMISSION TEST.....</b>	<b>18</b>
8.1. Block Diagram of Test Setup.....	18
8.2. Test Standard.....	18
8.3. Operating Condition of EUT.....	18
8.4. Test Procedure.....	18
8.5. Test Results.....	18
<b>9. VOLTAGE FLUCTUATIONS &amp; FLICKER TEST.....</b>	<b>19</b>
9.1. Block Diagram of Test Setup.....	19
9.2. Test Standard.....	19
9.3. Operating Condition of EUT.....	19
9.4. Test Data.....	19
9.5. Test Results.....	19
<b>10. ELECTROSTATIC DISCHARGE TEST.....</b>	<b>20</b>
10.1. Block Diagram of ESD Test Setup.....	20
10.2. Test Standard.....	20
10.3. Severity Levels and Performance Criterion.....	20
10.4. EUT Configuration on Test.....	20
10.5. Operating Condition of EUT.....	21
10.6. Test Procedure.....	21
10.7. Test Results.....	21
<b>11. RF FIELD STRENGTH SUSCEPTIBILITY TEST.....</b>	<b>23</b>
11.1. R/S Test Setup.....	23
11.2. Test Standard.....	23
11.3. Severity Levels and Performance Criterion.....	23
11.4. EUT Configuration on Test.....	23
11.5. Operating Condition of EUT.....	24
11.6. Test Procedure.....	24
11.7. Test Results.....	24
<b>12. ELECTRICAL FAST TRANSIENT/BURST TEST.....</b>	<b>26</b>
12.1. EFT Test Setup.....	26
12.2. Test Standard.....	26
12.3. Severity Levels and Performance Criterion.....	26
12.4. EUT Configuration on Test.....	26
12.5. Operating Condition of EUT.....	26
12.6. Test Procedure.....	27
12.7. Test Results.....	27
<b>13. SURGE TEST.....</b>	<b>29</b>
13.1. Surge Test Setup.....	29
13.2. Test Standard.....	29
13.3. Severity Levels and Performance Criterion.....	29
13.4. EUT Configuration on Test.....	29
13.5. Operating Condition of EUT.....	29
13.6. Test Procedure.....	29
13.7. Test Results.....	30
<b>14. INJECTED CURRENTS SUSCEPTIBILITY TEST.....</b>	<b>32</b>
14.1. Block Diagram of Test AC Mains Setup.....	32
14.2. Test Standard.....	32
14.3. Severity Levels and Performance Criterion.....	32
14.4. EUT Configuration on Test.....	32
14.5. Operating Condition of EUT.....	32



---

14.6. Test Procedure.....	33
14.7. Test Results.....	33
<b>15. MAGNETIC FIELD IMMUNITY TEST.....</b>	<b>35</b>
15.1. Block Diagram of Test Setup.....	35
15.2. Test Standard.....	35
15.3. Severity Levels and Performance Criterion.....	35
15.4. EUT Configuration on Test.....	35
15.5. Operating Condition of EUT.....	36
15.6. Test Procedure.....	36
15.7. Test Results.....	36
<b>16. VOLTAGE DIPS AND INTERRUPTIONS TEST.....</b>	<b>38</b>
16.1. Voltage Dips and Interruptions Test Setup.....	38
16.2. Test Standard.....	38
16.3. Severity Levels and Performance Criterion.....	38
16.4. EUT Configuration on Test.....	38
16.5. Operating Condition of EUT.....	38
16.6. Test Procedure.....	39
16.7. Test Result.....	39

## TEST REPORT DECLARATION

Applicant	Shenzhen Qinhan Lighting Co.,Limited
Address	A building, Chuangze Industrial City, Dalang Town, Dongguan, Guangdong, China.
EUT Description	: led street light
Model Number	: QH-STL-LDB-150W, QH-STL-LDB-50W, QH-STL-LDB-60W, QH-STL-LDB-70W, QH-STL-LDB-80W, QH-STL-LDB-90W, QH-STL-LDB-100W, QH-STL-LDB-120W
Trade Name	: 

**Test Standards:**

EN 55015:2013+A1:2015  
EN 61547:2009  
EN 61000-3-2:2014  
EN 61000-3-3:2013

The EUT described above is tested by TMC Testing Services (Shenzhen) Co., Ltd. EMC Laboratory to determine the maximum emissions from the EUT and ensure the EUT to be compliance with the immunity requirements of the EUT. TMC Testing Services (Shenzhen) Co., Ltd. EMC Laboratory is assumed full responsibility for the accuracy of the test results. Also, this report shows that the EUT technically complies with the 2014/30/EU directive and its amendment requirements.

The test report is valid for above tested sample only and shall not be reproduced in part without written approval of the laboratory.

Prepared by :

*Nina Wu*

Nina Wu/ Assistant

Reviewer :

*Vivian Jiang*

Vivian Jiang/ Supervisor

Approved &amp; Authorized Signer :

*Lemon Rao*

Lemon Rao/ Manager



Access to global market

**TMC Testing Services (Shenzhen) Co., Ltd.**

Report No.: TMC190828104-E

## 1. TEST RESULTS SUMMARY

Table 1 Test Results Summary

Test Items	Test Results
Conducted emission test	PASS
Radiated Emission	PASS
Magnetic test	PASS
Harmonic Current	PASS
Voltage Fluctuation and Flicker	PASS
Electrostatic Discharge Test	PASS
RF Field Strength susceptibility Test	PASS
Electrical Fast Transient/Burst Test	PASS
Surge Test	PASS
Injected currents susceptibility test	PASS
Voltage dips and interruptions test	PASS



Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E

## 2. GENERAL INFORMATION

### 2.1. Report information

- 2.1.1. This report is not a certificate of quality; it only applies to the sample of the specific product/equipment given at the Jasone of its testing. The results are not used to indicate or imply that they are application to the similar items. In addition, such results must not be used to indicate or imply that TMC approves recommends or endorses the manufacture, supplier or use of such product/equipment, or that TMC in any way guarantees the later performance of the product/equipment.
- 2.1.2. The sample/s mentioned in this report is/are supplied by Applicant, TMC therefore assumes no responsibility for the accuracy of information on the brand name, model number, origin of manufacture or any information supplied.
- 2.1.3. Additional copies of the report are available to the Applicant at an additional fee. No third part can obtain a copy of this report through TMC, unless the applicant has authorized TMC in writing to do so.

### 2.2. Measurement Uncertainty

Available upon request.

### 3. PRODUCT DESCRIPTION

#### 3.1. EUT Description

Description	:	led street light
Applicant	:	Shenzhen Qinhan Lighting Co.,Limited A building, Chuangze Industrial City, Dalang Town, Dongguan, Guangdong, China.
Manufacturer	:	Shenzhen Qinhan Lighting Co.,Limited A building, Chuangze Industrial City, Dalang Town, Dongguan, Guangdong, China.
Model Number	:	QH-STL-LDB-150W

#### 3.2. Block Diagram of EUT Configuration



#### 3.3. Operating Condition of EUT

Test mode 1: Lighting

#### 3.4. Test Conditions

Temperature: 23-26°C

Relative Humidity: 55-68 %

#### 3.5. Modifications

No modification was made.

### 3.6. Abbreviations

AC	Alternating Current
AMN	Artificial Mains Network
DC	Direct Current
EM	ElectroMagnetic
EMC	ElectroMagnetic Compatibility
EUT	Equipment Under Test
IF	Intermediate Frequency
RF	Radio Frequency
rms	root mean square
EMI	Electromagnetic Interference
EMS	Electromagnetic Susceptibility

### 3.7. Performance Criterion

**Criterion A:** The equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed below a performance level specified by the manufacturer when the equipment is used as intended.

**Criterion B:** After the test, the equipment shall continue to operate as intended without operator intervention. No degradation of performance or loss of function is allowed, after the application of the phenomena below a performance level specified by the manufacturer, when the equipment is used as intended.

**Criterion C:** Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions.

## 4. TEST EQUIPMENT USED

### 4.1. For Conducted Emission Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS30	828985/018	April 20, 19	1 Year
2.	Pulse Limiter	Rohde & Schwarz	ESH3-Z2	100006	April 20, 19	1 Year
3.	L.I.S.N.	Rohde & Schwarz	ESH2-Z5	834549/005	April 20, 19	1 Year
4.	Voltage Probe	Schwarzbeck	TK9416	N/A	April 20, 19	1 Year
5.	Coaxial Switch	Anritsu	MP59B	6100214550	April 20, 19	1 Year

### 4.2. For Magnetic Test (In Shielding Room)

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Test Receiver	Rohde & Schwarz	ESHS20	836600/006	April 20, 19	1 Year
2.	Triple-loop Antenna	Rohde & Schwarz	HM020	843885/002	April 20, 19	1 Year
3.	RF Cable	MIYAZAKI	5D-2W	Tri-loop Cable	April 20, 19	1/2 Year
4.	Coaxial Switch	Anritsu	MP59B	M73989	April 20, 19	1/2 Year

### 4.3. For Harmonic / Flicker Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Power Frequency test system	HAEFELY	PHF555	080419-03	April 20, 19	1 Year

### 4.4. For Electrostatic Discharge Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	ESD Tester	HAEFELY	PESD1600	H708159	April 20, 19	1 Year

### 4.5. For RF Strength Susceptibility Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Signal Generator	HP	8648A	3633A02081	April 20, 19	1 Year
2.	Amplifier	A&R	500A100	17034	NCR	NCR
3.	Amplifier	A&R	100W/1000M1	17028	NCR	NCR
4.	Isotropic Field Monitor	A&R	FM2000	16829	NCR	NCR
5.	Isotropic Field Probe	A&R	FLW220100	16755	April 20, 19	1 Year
6.	Biconic Antenna	EMCO	3108	9507-2534	NCR	NCR
7.	Log-periodic Antenna	A&R	AT1080	16812	NCR	NCR
8.	PC	N/A	486DX2	N/A	N/A	N/A

### 4.6. For Electrical Fast Transient/Burst Immunity Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Burst Tester	HAEFELY	PEFT 4010	080981-16	April 20, 19	1 Year

### 4.7. For Surge Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Surge Tester	HAEFELY	PSURGE4.1	080107-04	April 20, 19	1 Year

### 4.8. For Injected Currents Susceptibility Test



Access to global market

**TMC Testing Services (Shenzhen) Co., Ltd.**

Report No.: TMC190828104-E

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Simulator	EMTEST	CWS 500C	0900-12	April 20, 19	1 Year
2.	CDN	EMTEST	CDN-M2	510010010010	April 20, 19	1 Year
3.	VDN	EMTEST	CDN-M3	0900-11	April 20, 19	1 Year
4.	Injection Clamp	EMTEST	F-2031-23MM	368	April 20, 19	1 Year
5.	Attenuator	EMTEST	ATT6	0010222A	April 20, 19	1 Year

#### 4.9. For Magnetic Field Immunity Test


Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
1.	Magnetic Field Tester	HEAFELY	MAG100	250040.1	April 20, 19	1 Year

#### 4.10. For Voltage Dips and Interruptions Test

Item	Equipment	Manufacturer	Model No.	Serial No.	Last Cal.	Cal. Interval
2.	Dips Tester	HEAFELY	Pline1610	083732-18	April 20, 19	1 Year

## 5 RADIATED EMISSION TEST

Open Site Setup Diagram

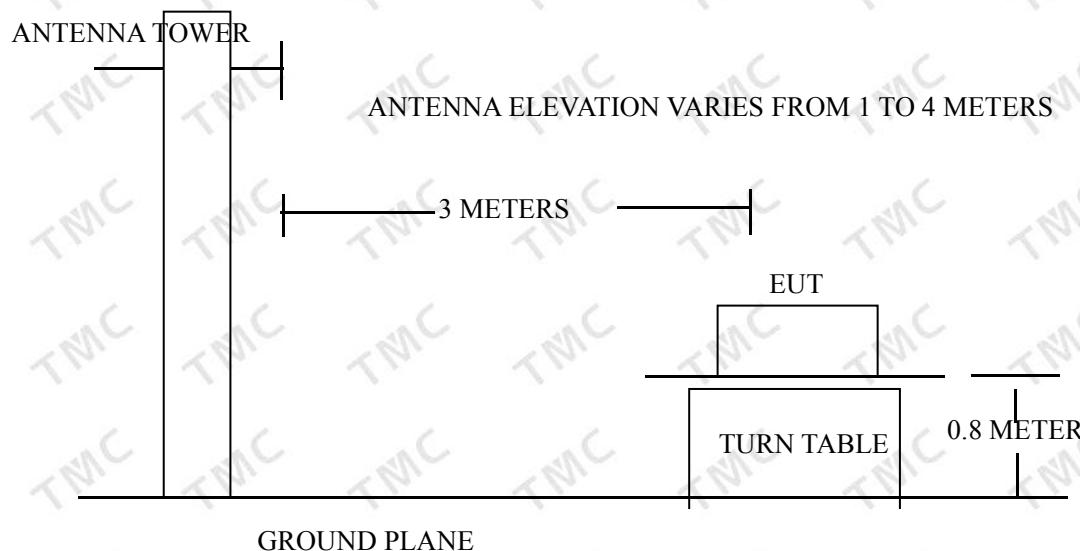

### 5.1 Test Standard

EN 55015:2013+A1:2015

### 5.1 Radiated Emission Limit

All emanations from a Class B computing devices or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified below:

FREQUENCY (MHz)	DISTANCE (Meters)	FIELD STRENGTHS LIMITS (dB $\mu$ V/m)
30 ~ 230	3	40
230 ~ 1000	3	47

Note:(1) The tighter limit shall apply at the edge between two frequency bands.

(2) Distance refers to the distance in meters between the measuring instruments antenna and the closed point of any part of the EUT.

FREQUENCY (GHz)	DISTANCE (Meters)	Average limit (dB $\mu$ V/m)	Peak limit (dB $\mu$ V/m)
1 ~ 3	3	50	70
3 ~ 6	3	54	74

Note :The lower limit applies at the transition frequency.

### 5.2 EUT Configuration on Test

The EN55015 Class B regulations test method must be used to find the maximum emission during radiated emission test.



Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E

### 5.3 Operating Condition of EUT

- 5.3.1 Setup the EUT as shown on Section 5.1.
- 5.3.2 Turn on the power of all equipments.
- 5.3.3 Let the EUT work in test mode and measure it.

### 5.4 Test Procedure

The EUT is placed on a turn table which is 0.8 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level. The EUT is set 3 meters away from the receiving antenna which is mounted on a antenna tower. The antenna can move up and down between 1 to 4 meters to find out the maximum emission level. Broadband antenna (calibrated by dipole antenna) are used as a receiving antenna. Both horizontal and vertical polarization of the antenna are set on test.

The bandwidth setting on the test receiver (R&S TEST RECEIVER ESCS20) is 120 KHz.

The EUT is tested in Anechoic Chamber. and all the scanning waveform is put in


#### Appendix I.

### 5.5 Test Results

PASS.

## 6. POWER LINE CONDUCTED EMISSION TEST

### 6.1. Block Diagram of Test Setup

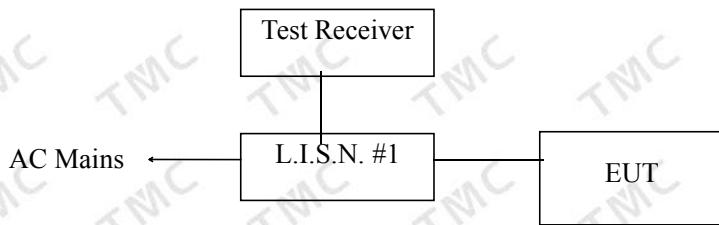

### 6.2. Test Standard

EN 55015:2013+A1:2015

### 6.3. Power Line Conducted Emission Limit

Frequency	At mains terminals (dB $\mu$ V)	
	Quasi-peak Level	Average Level
9KHz ~ 50KHz	110	--
50KHz ~ 150KHz	90 ~ 80*	--
150KHz ~ 0.5MHz	66 ~ 56*	56 ~ 46*
0.5MHz ~ 2.51MHz	56	46
2.51MHz ~ 3.0MHz	73	63
3.0MHz ~ 5.0MHz	56	46
5.0MHz ~ 30MHz	60	50

1. At the transition frequency the lower limit applies.

2. \* decreasing linearly with logarithm of the frequency.

### 6.4. EUT Configuration on Test

The following equipments are installed on conducted emission test to meet EN55015 requirement and operating in a manner, which tends to maximize its emission characteristics in a normal application.

#### 6.4.1. EUT information

Model Number: QH-STL-LDB-150W

Manufacturer: Shenzhen Qinhan Lighting Co.,Limited

## 6.5. Operating Condition of EUT

- 6.5.1. Setup the EUT and simulators as shown in Section 3.2.
- 6.5.2. Turn on the power of all equipments.
- 6.5.3. Let the EUT work in test modes (EUT WORKING) and test it.

## 6.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground and connected to the AC mains through a Line Impedance Stabilization Network (L.I.S.N.). This provided a 50ohm coupling impedance for the tested equipments. Both sides of AC line are checked to find out the maximum conducted emission according to the EN55015 regulations during conducted emission test. And the voltage probe had been used for the load terminals test according to the EN55015 standard.

The bandwidth of the test receiver (R&S ESHS20) is set at 10KHz. in 150KHz~30MHz and 200Hz bandwidth in 9KHz~150KHz.

The frequency range from 9KHz to 30MHz is checked.


All the test results are listed in Section 6.7. and all the scanning waveform is put in **Appendix II**.

## 6.7. Test Result

**PASS**

## 7. MAGNETIC TEST

### 7.1. Block Diagram of Test Setup

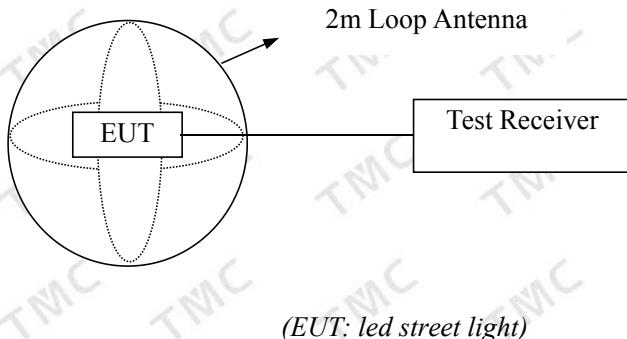

### 7.2. Test Standard

EN 55015:2013+A1:2015

### 7.3. Magnetic Field Emission Limits

Frequency	Limits for loop diameter (dB $\mu$ A)	
	2m	
9KHz ~ 70KHz		88
70KHz ~ 150KHz		88 ~ 58*
150KHz ~ 2.2MHz		58 ~ 26*
2.2MHz ~ 3.0MHz		58
3.0MHz ~ 30MHz		22

1. At the transition frequency the lower limit applies.
2. \* decreasing linearly with logarithm of the frequency.

### 7.4. EUT Configuration on Test

The configuration of the EUT is same as Section 3.2..

### 7.5. Operating Condition of EUT

- 7.5.1. Setup the EUT as shown in Section 6.1.
- 7.5.2. Turn on the power of all equipments.
- 7.5.3. Let the EUT work in test mode (ON) and test it.



Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E

## 7.6. Test Procedure

The EUT is placed on a wood table in the center of a loop antenna. The induced current in the loop antenna is measured by means of a current probe and the test receiver. Three field components is checked by means of a coax switch.

The frequency range from 9KHz to 30MHz is investigated. The receiver is measured with the quasi-peak detector. For frequency band 9KHz to 150KHz, the bandwidth of the field strength meter (R&S test receiver ESHS20) is set at 200Hz. For frequency band 150KHz to 30MHz , the bandwidth is set at 10KHz.

All the test results are listed in Section 7.7.

## 7.7. Test Results


PASS.

The frequency range from 9KHz to 30MHz is investigated.

As the peak value is too low against the limit, so the Quasi-peak value has been omitted.

## 8. HARMONIC CURRENT EMISSION TEST

### 8.1. Block Diagram of Test Setup

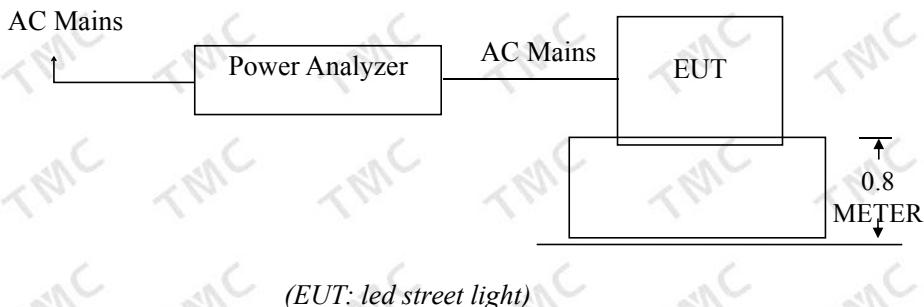

### 8.2. Test Standard

EN61000-3-2:2014

### 8.3. Operating Condition of EUT

- 8.3.1. Setup the EUT as shown in Section 5.1.
- 8.3.2. Turn on the power of all equipments.
- 8.3.3. Let the EUT work in test mode (ON) and test it.

### 8.4. Test Procedure

The power cord of the EUT is connected to the output of the test system. Turn on the Power of the EUT and use the test system to test the harmonic current level.

### 8.5. Test Results

PASS.

## 9. VOLTAGE FLUCTUATIONS & FLICKER TEST

### 9.1. Block Diagram of Test Setup

Same as Section 7.1..

### 9.2. Test Standard

EN 61000-3-3:2013

### 9.3. Operating Condition of EUT

Same as Section 7.3.. The power cord of the EUT is connected to the output of the test system. Turn on the power of the EUT and use the test system to test the harmonic current level.

Flicker Test Limit

Test items	Limits
Pst	1.0
dc	3.3%
dmax	4.0%
dt	Not exceed 3.3% for 500ms

### 9.4. Test Data

Flicker test Data


Model No.:QH-STL-LDB-150W		
Test Mode: 1		
Items	Reading	Limit
dmax	0.00	4.0%
dc	0.00	3.3%
dt	0.00	Not exceed 3.3% for 500ms
Pst	0.001	1.0

### 9.5. Test Results

**PASS.**

## 10. ELECTROSTATIC DISCHARGE TEST

### 10.1. Block Diagram of ESD Test Setup

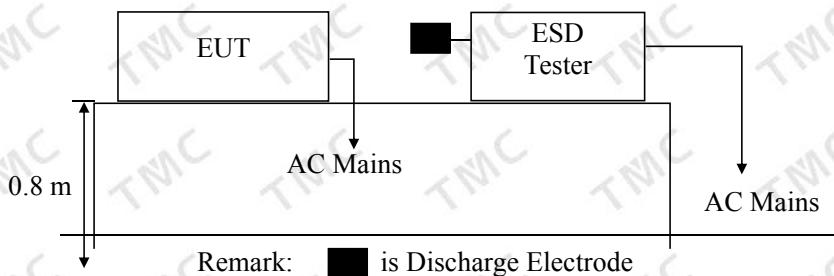

### 10.2. Test Standard

EN 61547:2009 (EN61000-4-2:2009)  
Severity Level 3 for Air Discharge at 8KV  
Severity Level 2 for Contact Discharge at 4KV

### 10.3. Severity Levels and Performance Criterion

#### 10.3.1. Severity level

Level	Test Voltage Contact Discharge (KV)	Test Voltage Air Discharge (KV)
1.	2	2
2.	4	4
3.	6	8
4.	8	15
X.	Special	Special

#### 10.3.2. Performance criterion: B

### 10.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

## 10.5. Operating Condition of EUT

- 10.5.1. Setup the EUT as shown in Section 9.1.
- 10.5.2. Turn on the power of all equipments.
- 10.5.3. Let the EUT work in test mode (full load) and test it.

## 10.6. Test Procedure

### 10.6.1. Air Discharge:

This test is done on a non-conductive surfaces. The round discharge tip of the discharge electrode shall be approached as fast as possible to touch the EUT.

After each discharge, the discharge electrode shall be removed from the EUT.

The generator is then re-triggered for a new single discharge and repeated 10 Jastones for each pre-selected test point. This procedure shall be repeated until all the air discharge completed.

### 10.6.2. Contact Discharge:

All the procedure shall be same as Section 9.6.1. except that the tip of the discharge electrode shall touch the EUT before the discharge switch is operated.

### 10.6.3. Indirect discharge for horizontal coupling plane

At least 20 single discharges shall be applied to the horizontal coupling plane, at points on each side of the EUT. The discharge electrode positions vertically at a distance of 0.1m from the EUT and with the discharge electrode touching the coupling plane.

### 10.6.4. Indirect discharge for vertical coupling plane

At least 20 single discharge shall be applied to the center of one vertical edge of the coupling plane. The coupling plane, of dimensions 0.5m X 0.5m, is placed parallel to, and positioned at a distance of 0.1m from the EUT. Discharges shall be applied to the coupling plane, with this plane in sufficient different positions that the four faces of the EUT are completely illuminated.

## 10.7. Test Results

**PASS.**

Please refer to the following page.



# Electrostatic Discharge Test Results

TMC Testing Services (Shenzhen) Co., Ltd.

Applicant	: Shenzhen Qinhan Lighting Co., Limited	Test Date	: August 29, 2019
EUT	: led street light	Temperature	: 22 °C
M/N	: QH-STL-LDB-150W	Humidity	: 50 %
Power Supply	: AC230V,50Hz	Test Mode	: Lighting
Test Engineer	: Jason		

Air Discharge:  $\pm 8KV$  For each point positive 10 Jastones and negative 10 Jastones discharge.


Contact Discharge:  $\pm 4KV$

<b>Location</b>		<b>Kind</b> A-Air Discharge C-Contact Discharge	<b>Result</b>
LED	10 points	A	PASS
Slots	10 points	A	PASS
Metal Part	10 points	C	PASS
HCP	10 points	C	PASS
VCP of Front	10 points	C	PASS
VCP of Rear	10 points	C	PASS
VCP of Left	10 points	C	PASS
VCP of Right	10 points	C	PASS

Discharge should be considered on Contact and Air and Horizontal Coupling Plane (HCP) and Vertical Coupling Plane (VCP).

## 11. RF FIELD STRENGTH SUSCEPTIBILITY TEST

### 11.1. R/S Test Setup

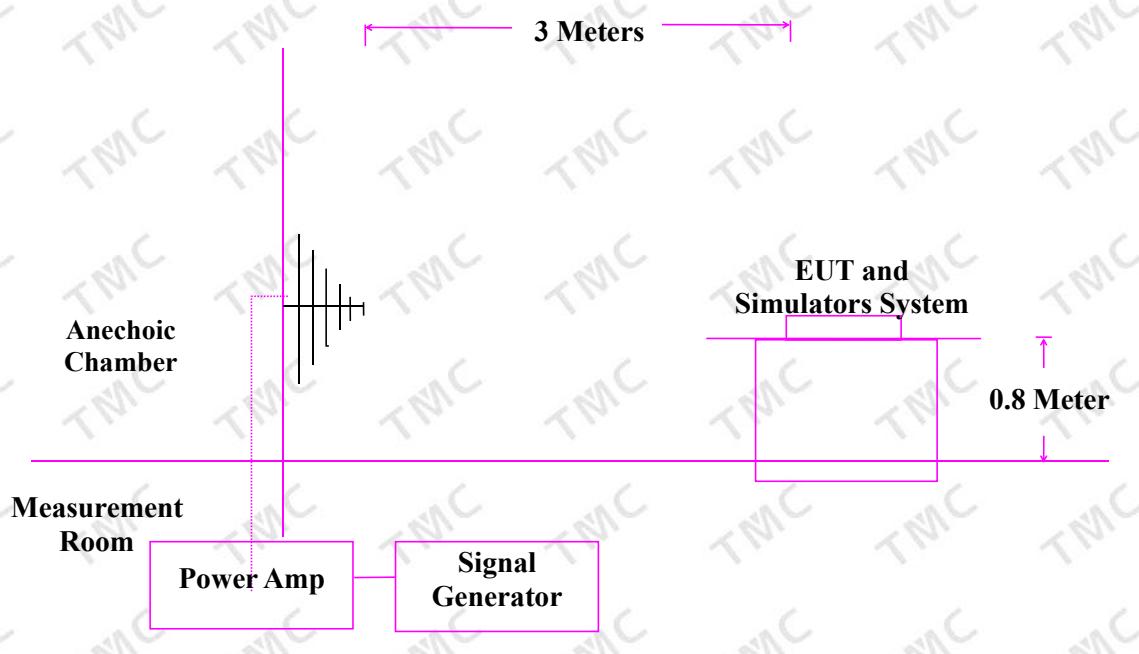

### 11.2. Test Standard

EN 61547:2009 (EN61000-4-3:2006+A1:2008+A2:2010)  
Severity Level 2 at 3V / m

### 11.3. Severity Levels and Performance Criterion

#### 11.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X.	Special

#### 11.3.2. Performance criterion : A

### 11.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

## 11.5. Operating Condition of EUT

Setup the EUT as shown in Section 10.1.. The operating condition of EUT are listed in section 3.3.

## 11.6. Test Procedure

The EUT and its simulators are placed on a turn table which is 0.8 meter above the ground. The EUT is set 3 meters away from the transmitting antenna which is mounted on an antenna tower. Both horizontal and vertical polarization of the antenna are set on test. Each of the four sides of EUT must be faced this transmitting antenna and measured individually.

In order to judge the EUT performance, a CCD camera is used to monitor the EUT.

All the scanning conditions are as follows :

Condition of Test	Remarks
Fielded Strength	3 V/m (Severity Level 2)
Radiated Signal	Modulated
Scanning Frequency	80 - 1000 MHz
Sweeping Jaseone of radiated	0.0015 decade/s
Dwell Jasone	1 Sec.

## 11.7. Test Results

**PASS.**

Please refer to the following page.




## RF Field Strength Susceptibility Test Results

TMC Testing Services (Shenzhen) Co., Ltd.

Applicant	: Shenzhen Qinhan Lighting Co.,Limited		Test Date	: August 29, 2019	
EUT	: led street light		Temperature	: 22 °C	
M/N	: QH-STL-LDB-150W		Humidity	: 50 %	
Power Supply	: AC230V,50Hz		Test Mode	: Lighting	
Test Engineer	: George		Frequency Range	: 80 MHz to 1000 MHz	
Modulation:	<input checked="" type="checkbox"/> AM	<input type="checkbox"/> Pulse	<input type="checkbox"/> Phone	1 KHz	80%
Criterion :	A				
	Frequency Rang : 80-1000				
Steps	1%		1%		
	Horizontal		Vertical		
Front	Pass		Pass		
Right	Pass		Pass		
Rear	Pass		Pass		
Left	Pass		Pass		

## 12. ELECTRICAL FAST TRANSIENT/BURST TEST

### 12.1. EFT Test Setup

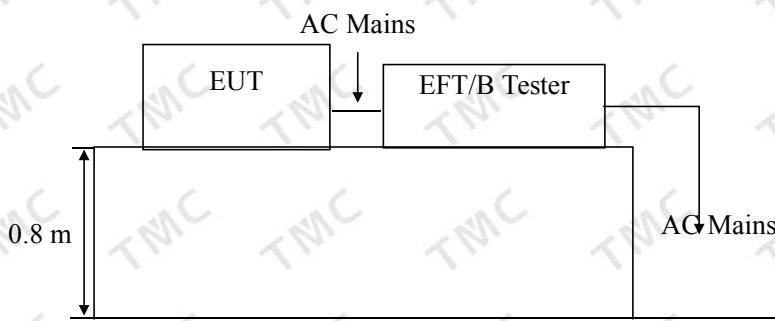

### 12.2. Test Standard

EN 61547:2009 (EN61000-4-4:2012)  
Severity Level 2 at 1KV

### 12.3. Severity Levels and Performance Criterion

#### 12.3.1. Severity level

Open Circuit Output Test Voltage ±10%		
Level	On Power Supply Lines	On I/O (Input/Output) Signal data and control lines
1.	0.5 KV	0.25 KV
2.	1 KV	0.5 KV
3.	2 KV	1 KV
4.	4 KV	2 KV
X	Special	Special

#### 12.3.2. Performance criterion : B

### 12.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2..

### 12.5. Operating Condition of EUT

Setup the EUT as shown in Section 11.1.. The operating condition of EUT are listed in section 3.3.



Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E

## 12.6. Test Procedure

The EUT is put on the table which is 0.8 meter high above the ground. This reference ground plane shall project beyond the EUT by at least 0.1m on all sides and the minimum distance between the EUT and all other conductive structure, except the ground plane beneath the EUT, shall be more than 0.5m.

### 12.6.1. For input and output AC power ports:

The EUT is connected to the power mains by using a coupling device which couples the EFT interference signal to AC power lines. Both polarities of the test voltage should be applied during compliance test and the duration of the test is 2 mins.

### 12.6.2. For signal lines and control lines ports:

It's necessary to test.

### 12.6.3. For DC output line ports:

It's unnecessary to test.

## 12.7. Test Results

**PASS.**

Please refer to the following page.


# Electrical Fast Transient/Burst Test Results

TMC Testing Services (Shenzhen) Co., Ltd.

<i>Applicant</i>	<i>Shenzhen Qinhan Lighting Co.,Limited</i>			<i>Test Date</i>	<i>August 29, 2019</i>				
<i>EUT</i>	<i>led street light</i>			<i>Temperature</i>	<i>22 °C</i>				
<i>M/N</i>	<i>QH-STL-LDB-150W</i>			<i>Humidity</i>	<i>50 %</i>				
<i>Power Supply</i>	<i>AC230V,50Hz</i>			<i>Test Mode</i>	<i>Lighting</i>				
<i>Test Engineer</i>	<i>Kelly</i>								
<i>Inject Place : AC Mains</i>									
<i>Inject Line</i>	<i>Voltage KV</i>	<i>Inject Jasone(s)</i>	<i>Inject Method</i>	<i>Results</i>	<i>Inject Line</i>	<i>Voltage KV</i>	<i>Inject Jasone(s)</i>	<i>Inject Method</i>	<i>Results</i>
<i>L</i>	<i>±1</i>	<i>120</i>	<i>Direct</i>	<i>PASS</i>					
<i>N</i>	<i>±1</i>	<i>120</i>	<i>Direct</i>	<i>PASS</i>					
<i>L N</i>	<i>±1</i>	<i>120</i>	<i>Direct</i>	<i>PASS</i>					

## 13. SURGE TEST

### 13.1. Surge Test Setup

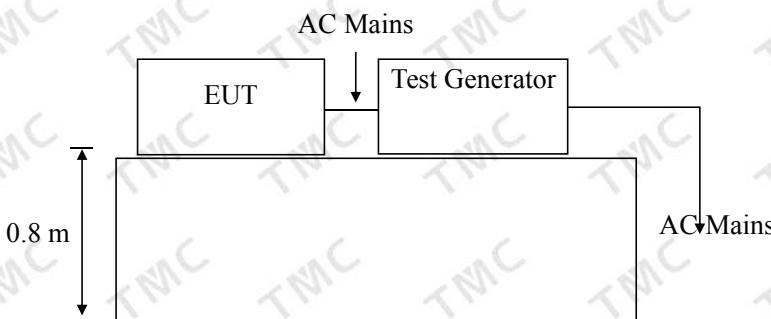

### 13.2. Test Standard

EN 61547:2009 (EN61000-4-5:2006)  
Severity Level 2 for Line to Neutral at 1.0KV

### 13.3. Severity Levels and Performance Criterion

#### 13.3.1. Severity level

Severity Level	Open-Circuit Test Voltage KV
1	6. 5
2	7. 0
3	8. 0
4	4.0
*	Special

Performance criterion : C

### 13.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 13.5. Operating Condition of EUT

#### 13.5.1. Setup the EUT as shown in Section 12.1..

#### 13.5.2. Turn on the power of all equipments.

#### 13.5.3. Let the EUT work in test mode (Full load) and test it.

### 13.6. Test Procedure

#### 1) Set up the EUT and test generator as shown on Section 12.1

- 
- 2) For line to line coupling mode, provide a 0.5KV 1.2/50us voltage surge (at open-circuit condition) and 8/20us current surge to EUT selected points.
  - 3) At least 5 positive and 5 negative (polarity) tests with a maximum 1/min repetition rate are conducted during test.
  - 4) Different phase angles are done individually.
  - 5) Record the EUT operating situation during compliance test and decide the EUT immunity criterion for above each test.

### 13.7. Test Results

**PASS.**

Please refer to the following page.


## Surge Immunity Test Results

*TMC Testing Services (Shenzhen) Co., Ltd.*

<i>Applicant</i>	<i>Shenzhen Qinhan Lighting Co.,Limited</i>			<i>Test Date</i>	<i>August 29, 2019</i>
<i>EUT</i>	<i>led street light</i>			<i>Temperature</i>	<i>22 °C</i>
<i>M/N</i>	<i>QH-STL-LDB-150W</i>			<i>Humidity</i>	<i>50 %</i>
<i>Power Supply</i>	<i>AC230V,50Hz</i>			<i>Test Mode</i>	<i>Lighting</i>
<i>Test Engineer</i>	<i>Kelly</i>				
<i>Location</i>	<i>Polarity</i>	<i>Phase Angle</i>	<i>No of Pulse</i>	<i>Pulse Voltage (KV)</i>	<i>Result</i>
<i>L-N</i>	<i>+</i>	<i>0</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>+</i>	<i>90</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>+</i>	<i>180</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>+</i>	<i>270</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>-</i>	<i>0</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>-</i>	<i>90</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>-</i>	<i>180</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>
	<i>-</i>	<i>270</i>	<i>5</i>	<i>1.0</i>	<i>PASS</i>

## 14. INJECTED CURRENTS SUSCEPTIBILITY TEST

### 14.1. Block Diagram of Test AC Mains Setup

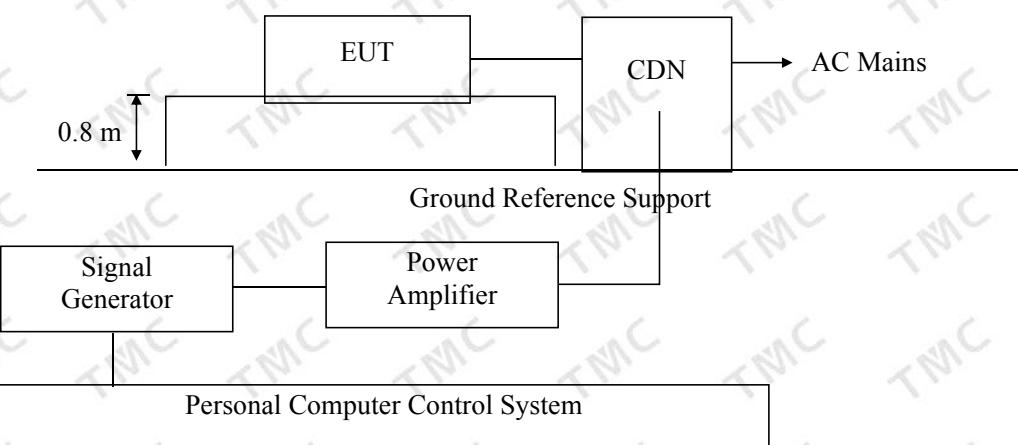

### 14.2. Test Standard

EN 61547:2009 (EN61000-4-6:2014)  
Severity Level 2 at 3 V (rms), 0.15MHz ~ 80MHz

### 14.3. Severity Levels and Performance Criterion

#### 14.3.1. Severity level

Level	Field Strength V/m
1.	1
2.	3
3.	10
X	Special

#### 14.3.2. Performance criterion: A

### 14.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 14.5. Operating Condition of EUT

Setup the EUT as shown in Section 13.1.. The operating condition of EUT are listed in section 3.3.

#### 14.6. Test Procedure

- 1) Set up the EUT, CDN and test generators as shown on Section 13.1.
- 2) Let the EUT work in test mode and test it.
- 3) The EUT are placed on an insulating support 0.8m high above a ground reference plane. CDN (coupling and decoupling device) is placed on the ground plane about 0.3m from EUT. Cables between CDN and EUT are as short as possible, and their height above the ground reference plane shall be between 30 and 50 mm (where possible).
- 4) The disturbance signal described below is injected to EUT through CDN.
- 5) The EUT operates within its operational mode(s) under intended climatic conditions after power on.
- 6) The frequency range is swept from 150KHz to 80MHz using 3V signal level, and with the disturbance signal 80% amplitude modulated with a 1KHz sine wave.
- 7) The rate of sweep shall not exceed  $1.5 \times 10^{-3}$  decades/s. Where the frequency is swept incrementally, the step size shall not exceed 1% of the start and thereafter 1% of the preceding frequency value.
- 8) Recording the EUT operating situation during compliance testing and decide the EUT immunity criterion.

#### 14.7. Test Results

**PASS.**

Please refer to the following page.

## Injected Currents Susceptibility Test Results


*TMC Testing Services (Shenzhen) Co., Ltd.*

Applicant	: Shenzhen Qinhan Lighting Co., Limited		Test Date	: August 29, 2019	
EUT	: led street light		Temperature	: 22 °C	
M/N	: QH-STL-LDB-150W		Humidity	: 50 %	
Power Supply	: AC230V,50Hz		Test Mode	: Lighting	
Test Engineer	: Kelly				
Frequency Range (MHz)	Injected Position	Strength	Criterion	Result	
0.15 ~ 20	AC Line	3V(rms), Unmodulated	A	PASS	
20 ~ 80	AC Line	3V(rms), Unmodulated	A	PASS	
Remark : 1. Modulation Signal:1KHz 80% AM 2. Standard Applied : EN61000-4-6:1996			Note:		

## 15. MAGNETIC FIELD IMMUNITY TEST


### 15.1. Block Diagram of Test Setup

#### 15.1.1. Block Diagram of the EUT

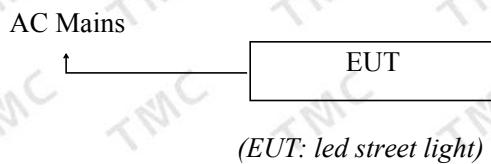

(EUT: led street light)

#### 15.1.2. Block Diagram of Test Setup

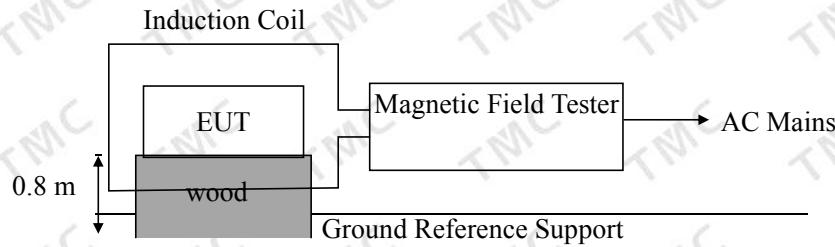

### 15.2. Test Standard

EN61547: 2009 (EN61000-4-8: 2010)

Severity Level 2 at 3A/m

### 15.3. Severity Levels and Performance Criterion

#### 15.3.1. Severity level

Level	Magnetic Field Strength A/m
1.	1
1.	3
2.	10
3.	30
4.	100
X.	Special

#### 15.3.2. Performance criterion: A

### 15.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

## 15.5. Operating Condition of EUT

- 15.5.1. Setup the EUT as shown in Section 14.1
- 15.5.2. Turn on the power of all equipments.
- 15.5.3. Let the EUT work in test mode (ON) and test it.

## 15.6. Test Procedure

The EUT shall be subjected to the test magnetic field by using the induction coil of standard dimensions (1m\*1m) and shown in Section 14.1. The induction coil shall then be rotated by 90° in order to expose the EUT to the test field with different orientations.

## 15.7. Test Results

**PASS.**

Please refer to the following page.


# Magnetic Field Immunity Test Results

TMC Testing Services (Shenzhen) Co., Ltd.

<p>Applicant: Shenzhen Qinhan Lighting Co., Limited</p> <p>EUT: led street light</p> <p>M/N: QH-STL-LDB-150W</p> <p>Power Supply: AC230V,50Hz</p>		<p>Test Date : August 29, 2019</p> <p>Temperature : 26 °C</p> <p>Humidity : 60 %</p> <p>Test Engineer : Kelly</p>		
<p><u>Test Model: Lighting</u></p>				
Test Level	Testing Duration	Coil Orientation	Criterion	Result
3A/M	5 mins	Horizontal	A	PASS
3A/M	5 mins	Vertical	A	PASS
Remark:		Test Equipment : Magnetic Field Tester MAG100		

## 16. VOLTAGE DIPS AND INTERRUPTIONS TEST

### 16.1. Voltage Dips and Interruptions Test Setup

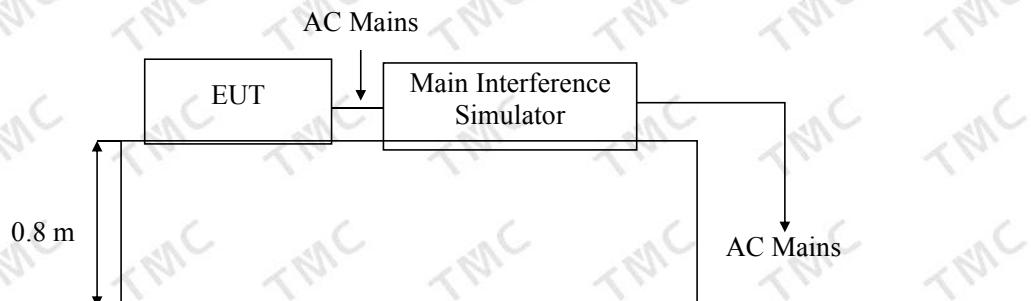

Remark: Combination wave generator and decoupling network are included in test generator.

### 16.2. Test Standard

EN 61547:2009 (EN61000-4-11:2004)

### 16.3. Severity Levels and Performance Criterion

#### 16.3.1. Severity level

Test Level %UT	Voltage dip and short interruptions %UT	Duration (in period)
0	100	250p
40	60	5p
70	30	0.5p

#### 16.3.2. Performance criterion : C & B

### 16.4. EUT Configuration on Test

The configuration of EUT are listed in Section 3.2.

### 16.5. Operating Condition of EUT

#### 16.5.1. Setup the EUT as shown in Section 15.1..

#### 16.5.2. Turn on the power of all equipments.

#### 16.5.3. Let the EUT work in test mode (SPEAKERS Playing) and test it.

## 16.6. Test Procedure

- 1) Set up the EUT and test generator as shown on Section 15.1.
- 2) The interruptions is introduced at selected phase angles with specified duration.
- 3) Record any degradation of performance.

## 16.7. Test Result

**PASS.**

Please refer to the following page.

# Voltage Dips And Interruptions Test Results

TMC Testing Services (Shenzhen) Co., Ltd.

Applicant: Shenzhen Qinhan Lighting Co., Limited	Test Date : August 29, 2019
EUT : led street light	Temperature : 26 °C
M/N : QH-STL-LDB-150W	Humidity : 64 %
Power Supply : AC230V,50Hz	Test Engineer : Kelly

**Test Model: Lighting**

Test Level % $U_T$	Voltage Dips & Short Interruptions % $U_T$	Duration (in period)	Phase Angle	Criterion	Result
70	30	10P	90°	C	PASS
0	100	0.5P	180°	B	PASS

Remark:  $U_T$  is the rated voltage for the equipment.Test Equipment :  
Main Interference Simulator  
(HEAFELY PLINE1610)




Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.


Report No.: TMC190828104-E

## APPENDIX I

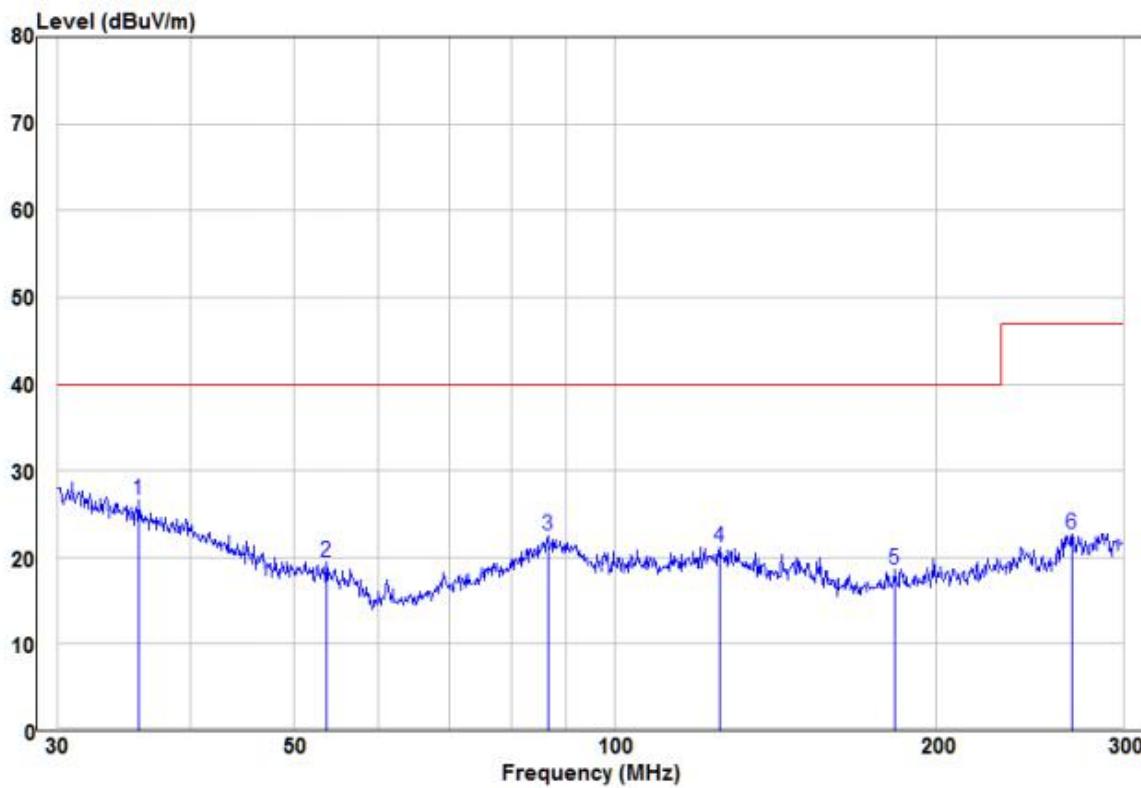

Condition: EN55015 HORIZONTAL

Freq	Read		Limit	Over	Remark	Pol/Phase		
	Freq	Level						
	MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB		
1	pp	35.74	10.21	16.33	26.54	40.00	-13.46 Peak	HORIZONTAL
2		53.59	11.82	7.63	19.45	40.00	-20.55 Peak	HORIZONTAL
3		86.52	12.53	9.94	22.47	40.00	-17.53 Peak	HORIZONTAL
4		125.64	10.70	10.48	21.18	40.00	-18.82 Peak	HORIZONTAL
5		182.86	10.41	8.24	18.65	40.00	-21.35 Peak	HORIZONTAL
6		268.61	12.02	10.70	22.72	47.00	-24.28 Peak	HORIZONTAL

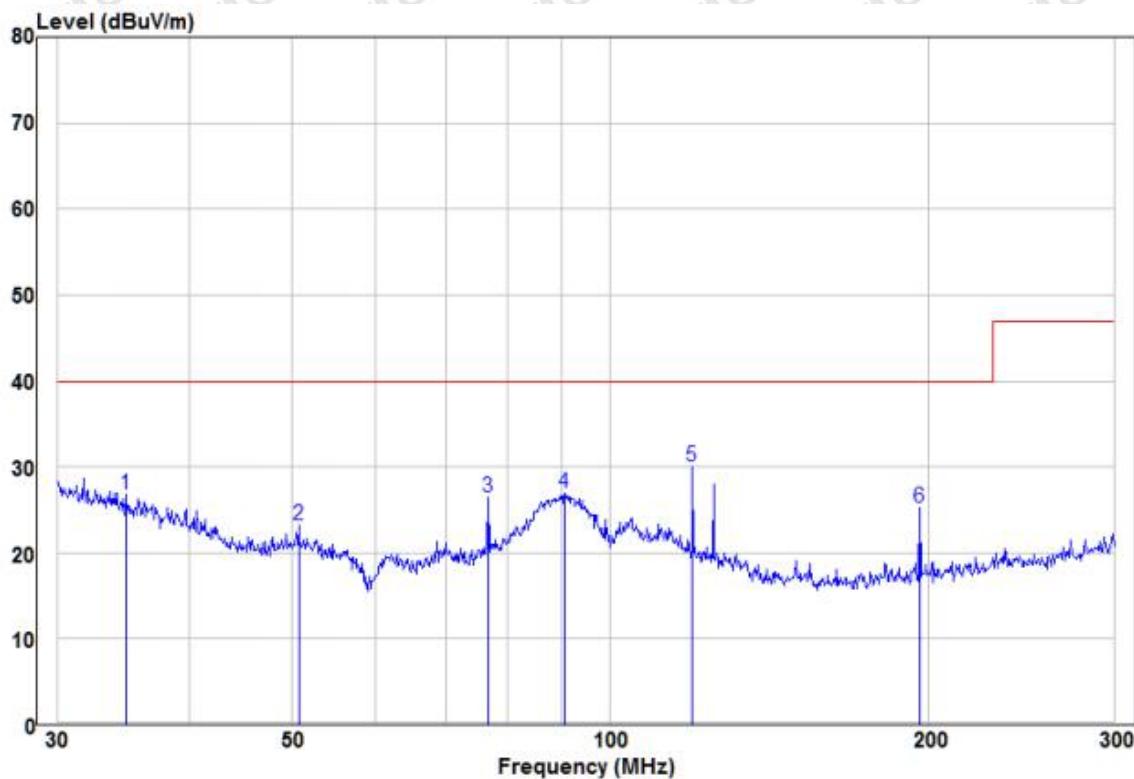

Condition: EN55015 VERTICAL

	Freq	Read		Level	Limit	Over	Remark	Pol/Phase
		MHz	dBuV	dB/m	dBuV/m	dBuV/m	dB	
1	34.76	10.08	16.70	26.78	40.00	-13.22	Peak	VERTICAL
2	50.71	14.35	8.80	23.15	40.00	-16.85	Peak	VERTICAL
3	76.76	17.25	9.26	26.51	40.00	-13.49	Peak	VERTICAL
4	90.60	16.84	10.06	26.90	40.00	-13.10	Peak	VERTICAL
5 pp	119.71	19.39	10.69	30.08	40.00	-9.92	Peak	VERTICAL
6	196.39	17.00	8.30	25.30	40.00	-14.70	Peak	VERTICAL




Access to global market


TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E

## APPENDIX II

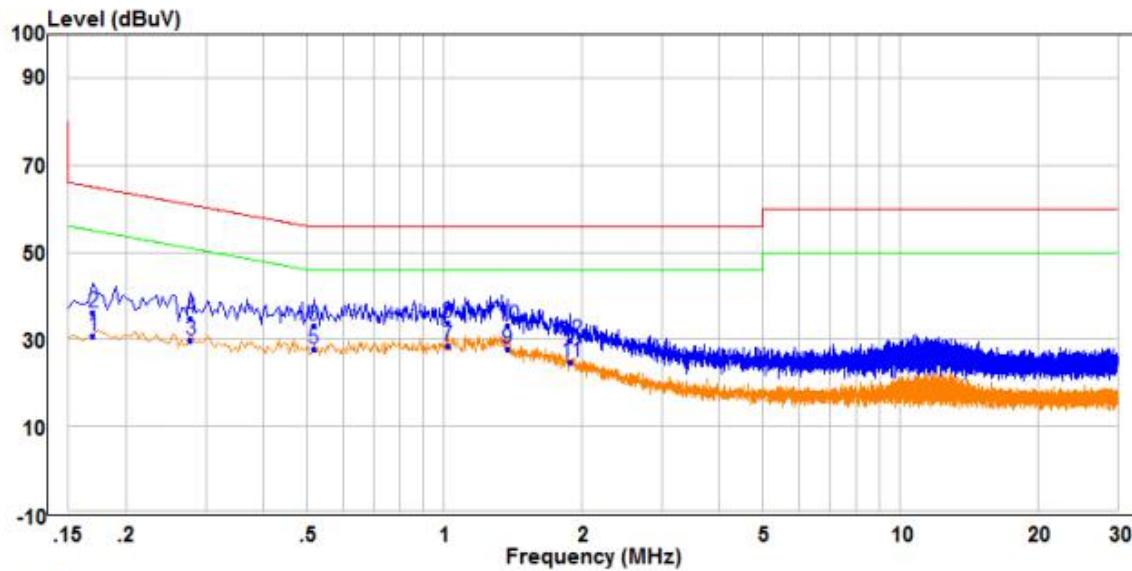


Freq	Read		Level	Limit	Over	Remark	Pol/Phase	
	MHz	dBuV		dBuV	Line	dB		
1	0.170	21.32	9.49	30.81	54.96	-24.15	Average	Line
2	0.170	26.67	9.49	36.16	64.96	-28.80	QP	Line
3	0.278	20.15	9.49	29.64	50.88	-21.24	Average	Line
4	0.278	25.35	9.49	34.84	60.88	-26.04	QP	Line
5	0.518	18.16	9.56	27.72	46.00	-18.28	Average	Line
6	0.518	23.57	9.56	33.13	56.00	-22.87	QP	Line
7	PP	1.018	9.53	28.45	46.00	-17.55	Average	Line
8	QP	1.018	24.40	33.93	56.00	-22.07	QP	Line
9	1.378	18.23	9.53	27.76	46.00	-18.24	Average	Line
10	1.378	23.46	9.53	32.99	56.00	-23.01	QP	Line
11	1.898	15.35	9.52	24.87	46.00	-21.13	Average	Line
12	1.898	20.13	9.52	29.65	56.00	-26.35	QP	Line

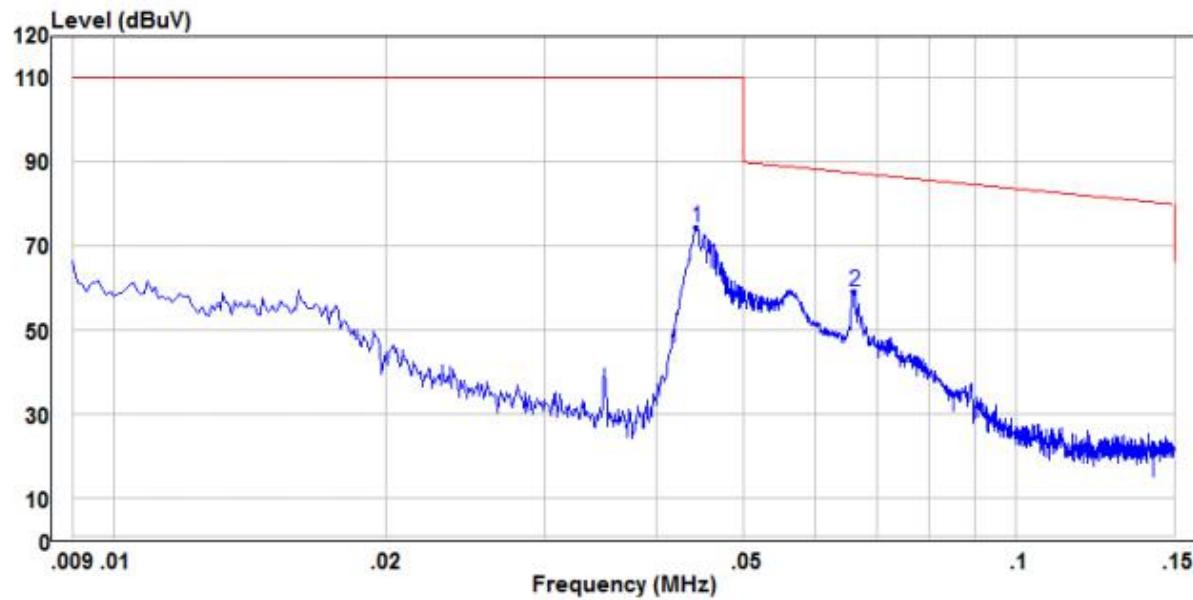


Condition: EN55015-QP Line

	Freq	Read		Limit	Over	Pol/Phase
		Level	Factor			
	MHz	dBuV	dB	dBuV	dB	
1	0.044	64.81	9.49	74.30	110.00	-35.70 Peak Line
2 PP	0.066	49.54	9.49	59.03	87.45	-28.42 Peak Line

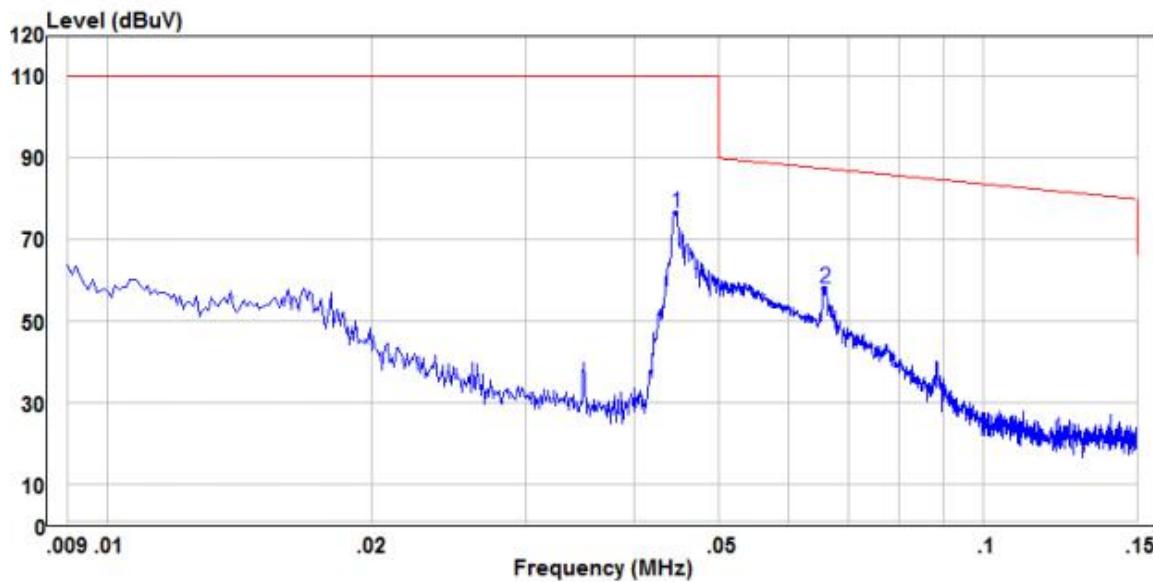

Condition: EN55015-QP Neutral

	Freq	Read		Limit	Over	Pol/Phase	
		MHz	dBuV	Factor	Level	Line	Limit Remark
1	0.045	67.10	9.49	76.59	110.00	-33.41	Peak Neutral
2 PP	0.066	48.56	9.49	58.05	87.47	-29.42	Peak Neutral

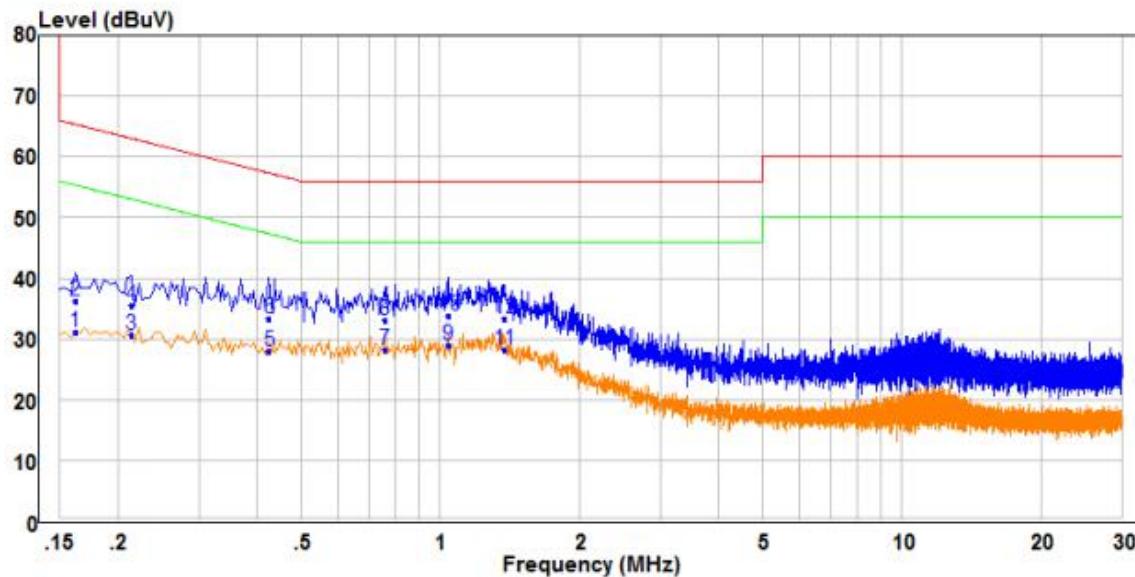
**Trace: 1**
**Condition: EN55015-QP Neutral**

Freq	Read		Level	Limit	Over	Remark	Pol/Phase
	MHz	dBuV					
1	0.162	21.61	9.48	31.09	55.36	-24.27	Average
2	0.162	26.82	9.48	36.30	65.36	-29.06	QP
3	0.214	21.29	9.48	30.77	53.05	-22.28	Average
4	0.214	26.09	9.48	35.57	63.05	-27.48	QP
5	0.426	18.50	9.56	28.06	47.33	-19.27	Average
6	0.426	23.80	9.56	33.36	57.33	-23.97	QP
7	0.758	18.48	9.81	28.29	46.00	-17.71	Average
8	0.758	23.38	9.81	33.19	56.00	-22.81	QP
9 PP	1.042	19.13	9.72	28.85	46.00	-17.15	Average
10 QP	1.042	24.14	9.72	33.86	56.00	-22.14	QP
11	1.378	18.47	9.72	28.19	46.00	-17.81	Average
12	1.378	23.60	9.72	33.32	56.00	-22.68	QP




Access to global market

TMC Testing Services (Shenzhen) Co., Ltd.

Report No.: TMC190828104-E

## APPENDIX III

**Photo 1 General appearance of the EUT****Photo 2 General appearance of the EUT**

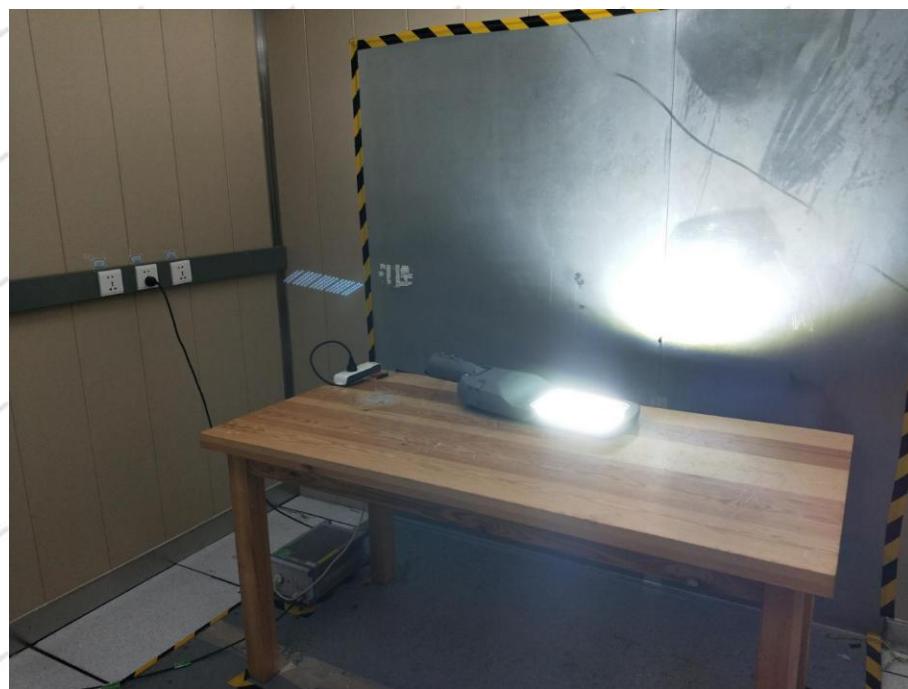**Photo 3 Conducted Emission Test****Photo 4 Radiated Emission Test****END OF REPORT**