




OPzV Series-Tubular Gel 12V 6OPzV120(12V120Ah)

Specifications

Rated Voltage	12V	
Nominal Capacity	120.0Ah	(C ₁₀ , 1.80V/cell)
Dimension	Length	483mm(19.02in.)
	Width	170mm(6.69in.)
	Container Height	224.5mm(8.84in.)
	Total Height	238.5mm(9.39in.)
Approx Weight	45.7Kg (100.8 lbs)	
Terminal	M8	
Container Material	ABS	
Rated Capacity (25C)	120.0 Ah	(10hr,12.0A,1.80V/cell)
	105.5 Ah	(5hr,21.1A,1.75V/cell)
	90.6 Ah	(3hr,30.2A,1.75V/cell)
	71.2 Ah	(1hr,71.2A,1.67V/cell)
Max. Discharge Current(5s)	960A	
Internal Resistance(25°C)	Approx.5.2mΩ	
Operating Temp.Range	Discharge	-20C~55C°(-4F~131F) °
	Charge	0C~40C°(32F~104F) °
	Storage	-20C~50C°(-4F~122F) °
Nominal Operating Temp. Range	25±3C (77±5F)	
Max.Charging Current(25C)°	30.0A	
Charge voltage(25C)	Float	13.5V
	Temp. Coefficient	-3mV/cell/C°
	Cycle(Equalization)	14.1~14.4V
Effect of temp. to Capacity	40°C (104 °F)	106%
	25C (77 °F)	100%
	0C (32 °F)	86%
Self Discharge	≤3% per month at 25C°	



Layout

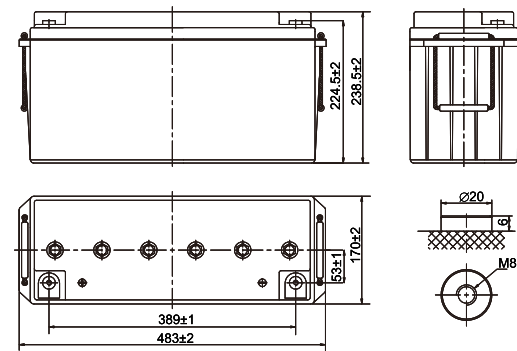

Constant Current Discharge (Amperes) at 25 °C (77 °F)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.85V/cell	115.8	102.1	76.3	55.8	35.4	27.0	19.3	13.6	11.5
1.80V/cell	139.2	118.0	85.7	61.2	38.3	28.9	20.3	14.2	12.0
1.75V/cell	159.7	131.8	92.2	65.2	40.2	30.2	21.1	14.5	12.2
1.70V/cell	174.4	143.2	98.6	68.9	41.6	31.4	21.6	14.8	12.4
1.67V/cell	190.7	153.6	103.2	71.2	43.1	32.5	22.1	15.0	12.6
1.60V/cell	203.6	162.4	107.0	73.1	44.5	33.2	22.6	15.2	12.8

Constant Power Discharge (Watts/cell) at 25 °C (77 °F)

F.V/Time	10min	15min	30min	1h	2h	3h	5h	8h	10h
1.85V/cell	190.6	175.2	145.7	108.6	69.1	52.8	38.0	26.9	22.9
1.80V/cell	230.4	208.8	163.6	118.6	74.5	56.4	39.8	28.1	23.9
1.75V/cell	267.8	230.4	174.4	125.5	78.0	59.0	41.3	28.8	24.4
1.70V/cell	295.2	248.2	184.9	132.0	80.4	61.0	42.2	29.3	24.6
1.67V/cell	311.0	258.2	191.5	135.6	82.7	62.9	43.1	29.6	25.0
1.60V/cell	319.2	263.5	196.7	139.0	85.1	64.0	43.9	30.1	25.3



OPzV Series-Tubular Gel 12V 6OPzV120(12V120Ah)

Applications

- Telecommunications
- Radio and cellular telephone relay stations
- Emergency lighting systems
- Power stations, Conventional power stations, alternative power (solar, wind)
- Large UPS and computer back-up
- Railway signaling
- Maritime standby power on ships and ashore
- Process and control engineering
- Standby power
- Buoy lighting


General Features

- 20 years design life (20°C)
- Better recovery performance
- Wide working temperature range (-20~55)°C
- No electrolyte stratification provides longer service life
- High recombination efficient
- Built in copper core based in lead will carry large current
- Separator imported from AMER-SIL high porosity, PVC-SiO₂ and low resistance
- Pasted negative plate special grid design increase the active material, availability large current discharge and charge ability
- Tubular type positive plate (polyester tube) prevent the active material from falling, Multi metal alloy pressed positive grid increase the anti corrosion ability and service life


Standards

- Compliance with IEC 60896, IEC 61427, DIN 40742 standards
- UL, CE Certified
- Manufactured in KOYAMA® IATF16949, OHSAS 18001, ISO 9001 and ISO 14001 certified production facilities


Charge voltage vs ambient temperature curve

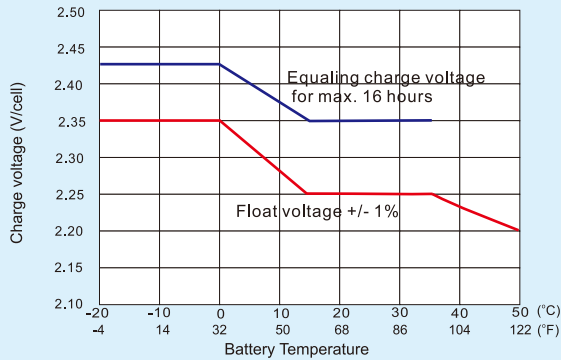

Temperature effects in relation to battery capacity

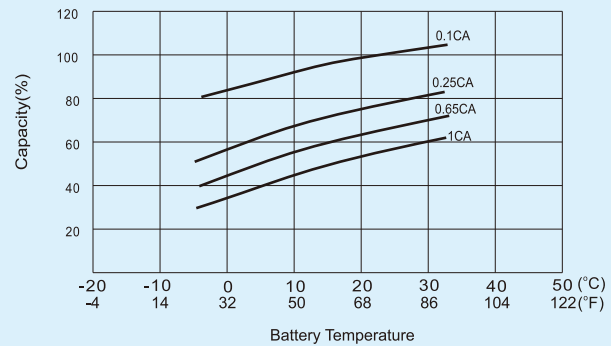

Cycle Life in Relation to DOD

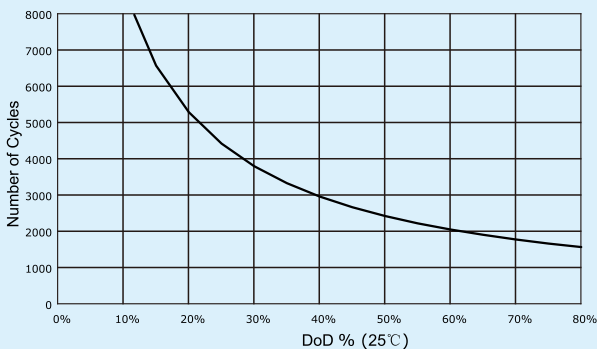

General Relation of Capacity VS. Storage Time

